

RED HORSE[®]

SCREWS

» PROFESSIONAL FASTENING SYSTEMS





RED HORSE

Niels Bohrs Vej 25, Stilling
8660 Skanderborg, Denmark

Tel.: +45 86950099

info@redhorse.dk
www.redhorse.dk

Ver. 2025-09-23

The content of this catalogue may not be reproduced, copied or duplicated in any way without our prior written consent. Whenever permitted the source must still always be mentioned. We bear no responsibility for typing errors and we reserve the right to change the information given in this catalogue without any further notice.





RED HORSE...

Professional developed and designed to cover a wide range of fastening solutions used in many industries.

RED HORSE supply both national and international markets. Throughout the organization our engineers are solving demanding tasks and projects in close cooperation with customers.

Our goal is to be the preferred and long term partner. RED HORSE aim to achieve this by constantly focusing on innovation, logistics and customer service.

RED HORSE believes in high professionalism and customer commitment, combined with an informal culture. We "don't stop" until our goal is achieved.

We welcome you at RED HORSE.



RED HORSE®

RED HORSE®

RED HORSE®

Product development

Intensive product- and design development are constantly resulting in new, optimized and unique products!

The result is everything from faster installation times, greater load capacity; improved corrosion resistance and enhanced service life, etc. – All helping to create ongoing savings for our customers. This process often results in patent and design protections.

Constant focus on new production processes, manufacturing methods and technologies are essential to RED HORSE. These focus areas combined with a pragmatic development culture where "In house tests" and "Field tests" are analyzed at our test facilities, leads to products and solutions that work in real life.

Our teams of engineers and sales managers are working together to satisfy customer needs and are looking forward to face new challenges.

Quality

Quality management is an important and natural part of everyday life at RED HORSE. At our test facilities we detect and document the process throughout the development and design phase. RED HORSE also performs SPC (Statistic Process Control) and batch control of the production.

Quality control is performed according to international standards. RED HORSE performs further testing if necessary.

Our test laboratory includes:

- Saltspraychamber
- Drill time tester
- X-ray equipment
- Torque tester
- Material alloy control (optical emission spectrometer)
- Hardness tester
- 2D measure device
- Portable tension testers

Production

Through a continuous introduction of robotics and new self-developed production equipment, we are continuously increasing production efficiency and flexibility.

Currently we have fully automatic and very flexible powder coating facilities which may be regarded as the leading power coating machinery in Europe. Besides powder coating equipment we have cold forming equipment for the production of screws, flasher assembly machines and a fully automatic packing plant.




Hardness tester



2D measurement gauge

QUALITY

» DEVELOPMENT, DOCUMENTATION, CONTROL

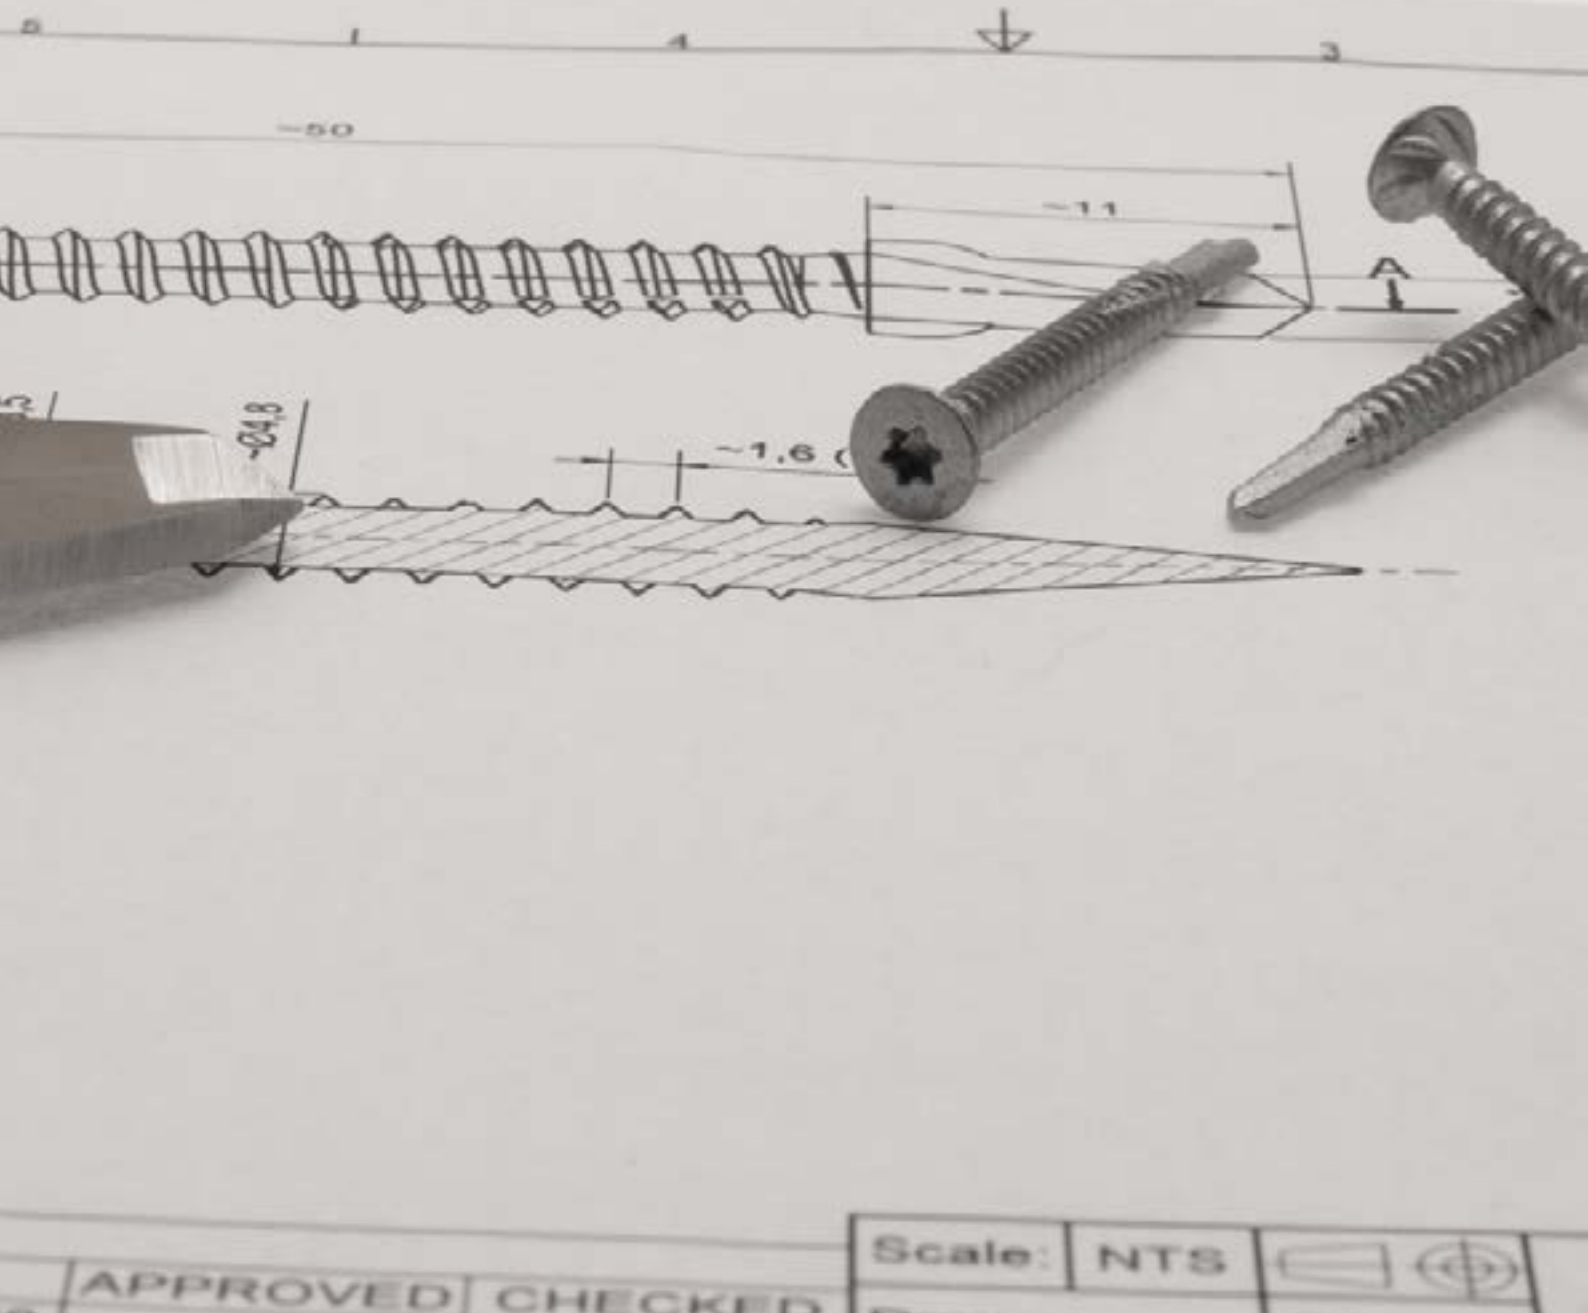

CE-marking and European Technical Approval (ETA):

As a part of our development and documentation work we implement approvals of our products in accordance with current European legislation, subsequently achieving CE-markings of these products. During the years we have been prepared ETA's from international certified third part institutes.

ETA's prepared on the basis common European guidelines. In cases where a harmonized EN standard has not yet been prepared, CE-marking is based on the current applicable ETA





RED HORSE
Niels Bohrs Vej 25, Stilling
8660 Skanderborg, Denmark

Tel.: +45 86950099

info@redhorse.dk
www.redhorse.dk

TABLE OF CONTENTS

9 Stitcher screws

20 Facade screws

33 Self drilling screws

58 Sandwich panel screws

68 Wing drill screws

72 Selftapping facade screws

88 Chipboard screws and other screws for wood

111 Ventilation screws

113 Drywall- and wafer head screws

118 Concrete screws

122 Accessories

127 CE-marking

129 Surface treatment

130 Coating

RED HORSE®

RED HORSE®

RED HORSE®

Example of a screw description:

HWH RXB 5.5 X L #1 "RXB" HX8 RX-14G

Head mark

Drill point

Length

Thread

Description	Material types
-	Carbon steel
RXB	Bi-metal stainless steel A2
RX4B	Bi-metal stainless steel A4
RX	Stainless steel A2
RX4	Stainless steel A4
RXX	Stainless steel 904L
ALU	Aluminium

Description	Drive types
HX	Hex 
TX	6-lobe 
PH	Phillips 
PZD	Pozi 
SQ	Square 

Description	Head types
HWH	Hex washer head 
HFH	Hex flange head 
CORONA™	Design head 
DC	Dome cap 
MH	Mushroom head 
PH	Pan head 
MIH	Mini head 
HH	Hex head 
CSH	Counter sunk head 
LP™	Low profile 
ETX	Design head 
NH	No head 

Description	Washer types
ALU-14B	Aluminium, 14mm, black EPDM
M-ALU-14B	M-shape aluminium, 14mm, black EPDM
RX-14G	Stainless steel, 14mm, grey EPDM
RX-14B	Stainless steel, 14mm, black EPDM
EPDM-9.5B	EPDM, 9.5mm, black

STITCHER SCREWS

» for stitching overlaps between sheets

		Page
STEEL SCREWS	HWH 4.8 X L #1 "A" HX8	10
	DC 4.8 X L #1 TX20 ALU-10B	10
	HWH 4.8 X L #1 "A" HX8 ALU-14B	11
	CORONA™ 4.8 X L #1 TX20 EPDM-9.5B	11
	LP™ 4.8 X L #1P TX20 M-ALU-14B	12
	HFH 6.3 X L #1 "A" HX8 ALU-16B	13
	HFH 6.3 X L #2 "A" HX8	13
	HFH 6.3 X L #2P "A" HX8	13
BI-METAL SCREWS	DC RXB 4.8 X L #1 TX20 RX-10B	14
	MIH RXB 4.8 X L #1 TX20	14
	HWH RXB 4.8 X L #1 "RXB" HX8 RX-14B	15
	CORONA™ RXB 4.8 X L #1 TX20 EPDM-9.5B	16
	CORONA™ RX4B 4.8 X L #1 TX20 EPDM-9.5B	16
	HWH RXB 5.5 X L #1 "RXB" HX8 RX-16B	17
	HWH RX4B 5.5 X L #1S "RX4B" HX8 RX4-16B	17
	HWH RXB 4.8 X L #PP "RXB" HX8 RX-14B	18
ALU SCREWS	HWH ALU 5.5 X L #1 "A" HX8 ALU-16B	19
	LP™ ALU 5.5 X L #1 TX20 M-ALU-14B	19



STITCHER SCREW

SELF DRILLING SCREW FOR STITCHING OVERLAPS OF SHEETS

- Drilling, tapping and fastening in one operation
- Hardened steel screw with reduced drill point #1
- PG:4730 surface treated with 10 µm zinc
- PG:7490 surface treated with ZYTEC™+
- Available in 500 colours (QUALICOAT certified quality powder)



European Technical Assessment
ETA-10/0021



Effective
Length



Hardened
steel

PRODUCT RANGE

MG:06 PG:4730 HWH 4.8 X L #1 "A" HX8



Download
Technical data sheet



Corrosion
category



HX



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10258	HWH 4.8 X 19 #1 "A" HX8	Ø4.8	19	10.0	#1	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	500

MG:06 PG:7490 DC 4.8 X L #1 TX20 ALU-10B



Download
Technical data sheet



Corrosion
category




TX



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
12275	DC 4.8 X 19 #1 TX20	-	Ø4.8	19	10.0	#1	2 x 0.5 - 2 x 1.0	Ø9.5 TX20	500
*16955	DC 4.8 X 19 #1 TX20 ALU-10B	ALU Ø10			7.0				

*Not ETA approved

APPLICATION

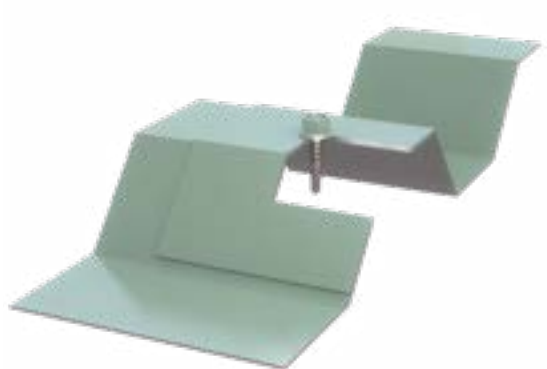

STITCHER SCREW

SELF DRILLING SCREW FOR STITCHING OVERLAPS OF SHEETS

- Drilling, tapping and fastening in one operation
- Hardened steel screw with reduced drill point #1
- Supplied with EPDM washer for better load distribution and increased sealing abilities
- PG: 2290 and 2330 is available with 20 µm zink
- PG: 2280 is available with ZYTEC™+
- Good corrosion resistance
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:2290 HWH 4.8 X L #1 "A" HX8 ALU-14B



Download
Technical data sheet



European Technical Assessment
ETA-10/0021



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13150	HWH 4.8 X 19 #1 "A" HX8 ALU-14B	ALU Ø14	Ø4.8	19	6.5	#1	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	250
10236	HWH 4.8 X 23 #1 "A" HX8 ALU-14B			23	10.5				



Download
Technical data sheet



European Technical Assessment
ETA-10/0021



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10210	CORONA 4.8 X 23 #1 TX20 EPDM-9.5B	EPDM Ø9.5	Ø4.8	23	13.0	#1	2 x 0.5 - 2 x 1.0	Ø13.8 TX20	250


APPLICATION



STITCHER SCREW

SELF DRILLING SCREW FOR STITCHING OVERLAPS OF SHEETS

- Drilling, tapping and fastening in one operation
- Hardened steel screw with reduced drill point #1P
- Supplied with EPDM washer for better load distribution and increased sealing abilities
- Available with ZYTEC™+
- Good corrosion resistance
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:2280 LP™ 4.8 X L #1P TX20 M-ALU-14B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10285	LP 4.8 X 23 #1P TX20 M-ALU-14B	M-ALU Ø14	Ø4.8	23	9.5	#1P	2 x 0.5 - 2 x 1.0	Ø9.1 TX20	250

APPLICATION



STITCHER SCREW

SELF DRILLING SCREW FOR STITCHING OVERLAPS OF SHEETS

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #2 or drill point #2P
- Surface treated with 10 µm zinc
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:2465 **HFH 6.3 X L #1 "A" HX8 ALU-16B**



Download
Technical data sheet



Corrosion
category



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
12358	HFH 6.3 X 22 #1 "A" HX8	-	Ø6.3	22	10.5	#1	2 x 0.7 - 2 x 1.5	Ø14.0 HEX 8.0	250
13025	HFH 6.3 X 22 #1 "A" HX8 ALU-16B	ALU Ø16			7.5				

MG:06 PG:7920 **HFH 6.3 X L #2 "A" HX8**



Download
Technical data sheet



Corrosion
category



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13026	HFH 6.3 X 23 #2 "A" HX8	Ø6.3	23	9.5	#2	2 x 1.0 - 2 x 2.0	Ø14.0 HEX 8.0	250

MG:06 PG:7930 **HFH 6.3 X L #2P "A" HX8**



Download
Technical data sheet



Corrosion
category



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13027	HFH 6.3 X 32 #2P "A" HX8	Ø6.3	32	14.0	#2P	2 x 1.0 - 2 x 2.0	Ø14.0 HEX 8.0	250


APPLICATION



BI-METAL STITCHER SCREW

SELF DRILLING SCREW FOR STITCHING OVERLAPS OF SHEETS

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with reduced drill point #1 in hardened steel
- Small and discrete mushroom head with TX20 recess
- Surface treated with zinc
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:4520 DC RXB 4.8 X L #1 TX20 RX-10B



Download
Technical data sheet



European Technical Assessment
ETA-10/0021



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10823	DC RXB 4.8 X 22 #1 TX20	-	Ø4.8	22	8.5	#1	2 x 0.5 - 2 x 1.0	Ø9.5 TX20	500
*16958	DC RXB 4.8 X 22 #1 TX20 RX-10B	A2 Ø10			6.5				

*Not ETA approved



Download
Technical data sheet

MG:06 PG:4515 MIH RXB 4.8 X L #1 TX20



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
16812	MIH RXB 4.8 X 23 #1 TX20	Ø4.8	23	9.5	#1	2 x 0.5 - 2 x 1.0	Ø7.2 TX20	500


APPLICATION



BI-METAL STITCHER SCREW

SELF DRILLING SCREW FOR STITCHING OVERLAPS OF SHEETS

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with reduced drill point #1 in hardened steel
- Small and discrete mushroom head with TX20 recess
- Good corrosion resistance
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:2500 HWH RXB 4.8 X L #1 "RXB" HX8 RX-14B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{eff} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10433	HWH RXB 4.8 X 23 #1 "RXB" HX8 RX-14B	A2 Ø14	Ø4.8	23	6.5	#1	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	250

APPLICATION



BI-METAL STITCHER SCREW

SELF DRILLING SCREW FOR STITCHING OVERLAPS OF SHEETS

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2/A4 with reduced drill point #1 in hardened steel
- Good corrosion resistance
- Supplied with EPDM washer for better load distribution and increased sealing abilities
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:2650 CORONA™ RXB 4.8 X L #1 TX20 EPDM-9.5B



Download
Technical data sheet



European Technical Assessment
ETA-10/0021



Corrosion
category



Bi-metal
stainless A2



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10490	CORONA RXB 4.8 X 23 #1 TX20 EPDM-9.5B	EPDM Ø9.5	Ø4.8	23	8.0	#1	2 x 0.5 - 2 x 1.0	Ø13.8 TX20	250



Download
Technical data sheet



European Technical Assessment
ETA-10/0021



Corrosion
category



Bi-metal
stainless A4



MG:06 PG:2665 CORONA™ RX4B 4.8 X L #1 TX20 EPDM-9.5B

Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
15435	CORONA RX4B 4.8 X 23 #1 TX20 EPDM-9.5B	EPDM Ø9.5	Ø4.8	23	8.0	#1	2 x 0.5 - 2 x 1.0	Ø13.8 TX20	250

APPLICATION



BI-METAL STITCHER SCREW

SELF DRILLING SCREW FOR STITCHING OVERLAPS OF SHEETS

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with reduced drill point #1 in hardened steel
- Good corrosion resistance
- Supplied with Ø16 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:2520 HWH RXB 5.5 X L #1 "RXB" HX8 RX-16B



Download
Technical data sheet



European Technical Assessment
ETA-10/0021



Corrosion
category



Bi-metal
stainless A2



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10450	HWH RXB 5.5 X 22 #1 "RXB" HX8 RX-16B	A2 Ø16	Ø5.5	22	5.5	#1	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	250

MG:06 PG:2525 HWH RX4B 5.5 X L #1S "RX4B" HX8 RX4-16B



Download
Technical data sheet



Corrosion
category



Bi-metal
stainless A4



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
20268	HWH RX4B 5.5 X 25 #1S "RX4B" HX8	-	Ø5.5	25	9.0	#1S	2 x 1.5	Ø10.0 HEX 8.0	250
20598	HWH RX4B 5.5 X 25 #1S "RX4B" HX8 RX4-16B	A4 Ø16			5.5				

APPLICATION



BI-METAL STITCHER SCREW

SELF DRILLING SCREW FOR STITCHING OVERLAPS OF SHEETS

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with piercing point in hardened steel
- Supplied with Ø14 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available in 500 colours (QUALICOAT certified facade quality powder)



PRODUCT RANGE

MG:06 PG:2502 HWH RXB 4.8 X L #PP "RXB" HX8 RX-14B



Download
Technical data sheet




Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
17718	HWH RXB 4.8 X 23 #PP "RXB" HX8	-	Ø4.8	23	8.0	#PP	2 x 0.5 - 2 x 1.0	10.0 HEX 8.0	250
17997	HWH RXB 4.8 X 23 #PP "RXB" HX8 RX-14B	A2 Ø14			4.5				

ALU STITCHER SCREW

SELF DRILLING SCREW FOR STITCHING OVERLAPS OF ALU SHEETS

- Drilling, tapping and fastening in one operation
- Hardened alu screw with reduced drill point #1
- Supplied with Ø16 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available in 500 colours (QUALICOAT certified facade quality powder)



PRODUCT RANGE

MG:06 PG:5190 HWH ALU 5.5 X L #1 "A" HX8 ALU-16B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
12102	HWH ALU 5.5 X 20 #1 "A" HX8 ALU-16B	ALU Ø16	Ø5.5	20	5.5	#1	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	250

MG:06 PG:2105 LP™ ALU 5.5 X L #1 TX20 M-ALU-14B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
18683	LP ALU 5.5 X 20 #1 TX20 M-ALU-14B	M-ALU Ø14	Ø5.5	20	4.0	#1	2 x 0.5 - 2 x 1.0	Ø9.1 TX20	250

APPLICATION



FACADE SCREWS

» for fastening of sheets to wood

		Page
STEEL SCREWS	PH 4.2 X L #1 TX20 ALU-10B	21
	HWH A 4.8 X L #PP "A" HX8 ALU-14B	22
	HWH 4.8 X L #1 "A" HX8 ALU-14B	23
	CORONA™ 4.8 X L #1 TX20 EPDM-9.5B	23
	LP™ 4.8 X L #1 TX20 M-ALU-14B	24
	LP™ 4.8/5.5 X L #1 TX20 M-ALU-14B	24
	HWH 5.5 X L/L1 #1 HX8 TX20 ALU-16B	25
	HWH A 4.8 X L "A" HX8 W ALU-14B	26
	HFH 6.5 X L #1+ "A" HX8 ALU-16B	27
BI-METAL SCREWS	PH RXB 4.2 X L #1 TX20 RX-12B	28
	HWH RXB 4.8 X L #1 "RXB" HX8 RX-14B	29
	CORONA™ RXB 4.8 X L #1 TX20 EPDM-9.5B	30
	CORONA™ RX4B 4.8 X L #1 TX20 EPDM-9.5B	30
	HFH RXB 6.5 X L #1+ "RXB" HX8 RX-16B	31
ALU SCREWS	HWH ALU 5.5 X L #1 "A" HX8 ALU-16B	32
	LP™ ALU 5.5 X L #1 TX20 M-ALU-14B	32



FACADE SCREW

SELF DRILLING SCREW FOR FASTENING OF SHEETS TO WOOD

- Drilling, tapping and fastening in one operation
- Pan head with TX20 recess
- Supplied with Ø10 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available in 500 colours (QUALICOAT certified facade quality powder)



PRODUCT RANGE

MG:06 PG:8085 PH 4.2 X L #1 TX20 ALU-10B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
16868	PH 4.2 X 25 #1 TX20 ALU-10B	ALU Ø10	Ø4.2	25	17.5	#1	2 x 0.5 - 2 x 1.0	Ø9.5 TX20	250

APPLICATION



SELF TAPPING FACADE SCREW, A

SCREW FOR FASTENING OF STEEL CLADDING TO WOOD OR STEEL

- Tapping and fastening in one operation
- Up to 0.7 mm steel without predrilling
- Supplied with Ø14 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Surface treated with 20 µm zinc
- Also available without washer
- Available in 500 colours (QUALICOAT certified facade quality powder)



PRODUCT RANGE




Download
Technical data sheet

MG:06 PG:2210 HWH A 4.8 X L #PP "A" HX8 ALU-14B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Drill capacity	Head [mm]	Unit [pcs]
12994	HWH A 4.8 X 25 #PP "A" HX8 ALU-14B	ALU Ø14	Ø4.8	25	Max 0.7	Ø10.0 HEX 8.0	250
13412	HWH A 4.8 X 38 #PP "A" HX8 ALU-14B			38			

APPLICATION

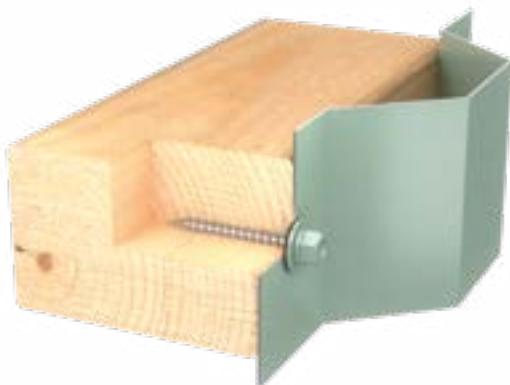

FACADE SCREW

SELF DRILLING SCREW FOR FASTENING OF SHEETS TO WOOD

- Drilling, tapping and fastening in one operation
- Hardened steel screw with reduced drill point #1
- Supplied with EPDM washer for better load distribution and increased sealing abilities
- PG: 2220 and 2320 are available with 20 µm zinc
- The CORONA™ screw with TX20 recess is shaped so that the EPDM sealing ring is partly concealed after fastening
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:2220 HWH 4.8 X L #1 "A" HX8 ALU-14B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
12340	HWH 4.8 X 28 #1 "A" HX8 ALU-14B	ALU Ø14	Ø4.8	28	19.0	#1	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	250
10299	HWH 4.8 X 35 #1 "A" HX8 ALU-14B			35	26.0				100
12769	HWH 4.8 X 50 #1 "A" HX8 ALU-14B			50	41.0				
10303	HWH 4.8 X 60 #1 "A" HX8 ALU-14B			60	51.0				
10027	HWH 4.8 X 80 #1 "A" HX8 ALU-14B			80	71.0				

MG:06 PG:2320 CORONA™ 4.8 X L #1 TX20 EPDM-9.5B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10203	CORONA 4.8 X 35#1 TX20 EPDM-9.5B	EPDM Ø9.5	Ø4.8	35	27.5	#1	2 x 0.5 - 2 x 1.0	Ø13.8 TX20	250
19410	CORONA 4.8 X 60#1 TX20 EPDM-9.5B			60	52.5				100

APPLICATION



FACADE SCREW

SELF DRILLING SCREW FOR FASTENING OF SHEETS TO WOOD

- Drilling, tapping and fastening in one operation
- Hardened steel screw with reduced drill point #1
- Supplied with Ø14 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- If slightly tilted angle of fastening the sealing is still the same
- High thread at the head for better grip in the sheet. Protects the sheet – no deformation
- Surface treated with ZYTEC™+ for good corrosion resistance
- Available in 500 colours (QUALICOAT certified powder)



European Technical Assessment
ETA-10/0021



Effective
Length



TX



Corrosion
category



Hardened
steel

PRODUCT RANGE

MG:06 PG:2260 LP™ 4.8 X L #1 TX20 M-ALU-14B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10251	LP 4.8 X 35 #1 TX20 M-ALU-14B	M-ALU Ø14	Ø4.8	35	24.5	#1	2 x 0.5 - 2 x 1.0	Ø9.1 TX20	250

MG:06 PG:4660 LP™ 4.8/5.5 X L #1 TX20 M-ALU-14B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10981	LP 4.8/5.5 X 65 #1 TX20 M-ALU-14B	M-ALU Ø14	Ø4.8	65	55.5	#1	2 x 0.5 - 2 x 1.0	Ø9.1 TX20	100

APPLICATION




FACADE SCREW

SELF DRILLING SCREW FOR FASTENING OF SHEETS TO WOOD

- Drilling, tapping and fastening in one operation
- Hardened steel screw with reduced drill point #1
- Supplied with Ø16 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available with ZYTEC™ GX for good corrosion resistance
- Available in 500 colours (QUALICOAT certified facade quality powder)

PRODUCT RANGE



MG:06 PG:2415 HWH 5.5 X L/L1 #1 HX8 TX20 ALU-16B



Download
Technical data sheet




Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
18081	HWH 5.5 X 60/35 #1 HX8 TX20	-	Ø5.5	60	53.0	#1	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0 TX20	100
18082	HWH 5.5 X 60/35 #1 HX8 TX20 ALU-16B	ALU Ø16			49.5				

FACADE SCREW WITH WINGS

SELF DRILLING SCREW FOR FASTENING OF POLYCARBONATE SHEETS TO WOOD

- Drilling, tapping and fastening in one operation
- Hardened steel screw with reduced drill point #1
- The wings makes a larger hole in the polycarbonate sheet - allowing sligth movement of the sheet and thereby avoid cracking, when the sun heats up the polycarbonate
- Supplied with Ø14 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Surface treated with zinc 20 µm zinc
- Available in 500 colours (QUALICOAT certified facade quality powder)



PRODUCT RANGE

MG:06 PG:8030 HWH 4.8 X L #1 "A" HX8 W ALU-14B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{eff} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13068	HWH 4.8 X 35 #1 "A" HX8 W ALU-14B	ALU Ø14	Ø4.8	35	26.0	#1	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	250


APPLICATION



GLULAM SCREW

SELF DRILLING SCREW FOR FASTENING OF SHEETS TO GLULAM

- Drilling, tapping and fastening in one operation
- Hardened steel screw with reduced drill point #1+
- Large flange under the head for better load distribution
- Surface treated with ZYTEC™ D
- Available in 500 colours (QUALICOAT certified facade quality powder)



PRODUCT RANGE

MG:06 PG:7950 HFH 6.5 X L #1+ "A" HX8 ALU-16B



Download
Technical data sheet



Art.no.	Item name	Flange [mm]	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13034	HFH 6.5 X 55 #1+ "A" HX8	-	-	Ø6.5	55	42.0	#1+	Max. 4 x 1.25	Ø14.0 HEX 8.0	250
16810	HFH 6.5 X 55 #1+ "A" HX8 ALU-16B		ALU Ø16			38.5				

APPLICATION




FACADE SCREW

SELF DRILLING SCREW FOR FASTENING OF SHEETS TO WOOD

- Drilling, tapping and fastening in one operation
- Pan head with TX20 recess
- Supplied with Ø10 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available in 500 colours (QUALICOAT certified powder)

PRODUCT RANGE



MG:06 PG:3275 PH RXB 4.2 X L #1 TX20 RX-10B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
17614	PH RXB 4.2 X 25 #1 TX20 RX-10B	A2 Ø10	Ø4.2	25	12.0	#1	2 x 0.5 - 2 x 1.0	Ø9.5 TX20	250

APPLICATION



BI-METAL FACADE SCREW

SELF DRILLING SCREW FOR FASTENING OF SHEETS TO WOOD

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2/A4 with reduced drill point #1 in hardened steel
- Supplied with EPDM washer for better load distribution and increased sealing abilities
- Good corrosion resistance
- Available in 500 colours (QUALICOAT certified powder)



European Technical Assessment
ETA-10/0021



Effective
Length



HX



Corrosion
category



Bi-metal
stainless A2

PRODUCT RANGE

MG:06 PG:2510 HWH RXB 4.8 X L #1 "RXB" HX8 RX-14B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10436	HWH RXB 4.8 X 35 #1 "RXB" HX8 RX-14B	A2 Ø14	Ø4.8	35	18.0	#1	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	250
10439	HWH RXB 4.8 X 60 #1 "RXB" HX8 RX-14B			60	43.0				100
18686	HWH RXB 4.8 X 80 #1 "RXB" HX8 RX-14B			80	63.0				


APPLICATION



BI-METAL FACADE SCREW

SELF DRILLING SCREW FOR FASTENING OF SHEETS TO WOOD

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2/A4 with reduced drill point #1 in hardened steel
- Supplied with EPDM washer for better load distribution and increased sealing abilities
- Good corrosion resistance
- Available in 500 colours (QUALICOAT certified powder)



European Technical Assessment
ETA-10/0021

Effective
Length

TX

PRODUCT RANGE

MG:06 PG:2660 CORONA™ RXB 4.8 X L #1 TX20 EPDM-9.5B



Download
Technical data sheet



Corrosion
category



Bi-metal
stainless A2



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10491	CORONA RXB 4.8 X 35 #1 TX20 EPDM-9.5B	EPDM Ø9.5	Ø4.8	35	20.0	#1	2 x 0.5 - 2 x 1.0	Ø13.8 TX20	250
10492	CORONA RXB 4.8 X 60 #1 TX20 EPDM-9.5B			60	45.0				100
18510	CORONA RXB 4.8 X 80 #1 TX20 EPDM-9.5B			80	65.0				

MG:06 PG:2666 CORONA™ RX4B 4.8 X L #1 TX20 EPDM-9.5B



Download
Technical data sheet



Corrosion
category



Bi-metal
stainless A4



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
15546	CORONA RX4B 4.8 X 35 #1 TX20 EPDM-9.5B	EPDM Ø9.5	Ø4.8	35	20.0	#1	2 x 0.5 - 2 x 1.0	Ø13.8 TX20	250

APPLICATION



BI-METAL GLULAM SCREW

SELF DRILLING SCREW FOR FASTENING OF SHEETS TO GLULAM

- Drilling, tapping and fastening in one operation
- Hardened steel screw with reduced drill point #1+
- Large flange under the head for better load distribution
- Good corrosion resistance
- Available in 500 colours (QUALICOAT certified powder)

PRODUCT RANGE

MG:06 PG:7945 HFH RXB 6.5 X L #1+ "RXB" HX8 RX-16B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
19294	HFH RXB 6.5 X 60 #1+ "RXB" HX8	-	Ø6.5	60	33.5	#1+	Max. 4 x 1.25	Ø14.0 HEX 8.0	100
20547	HFH RXB 6.5 X 60 #1+ "RXB" HX8 RX-16B	A2 Ø16			30.5				

APPLICATION



ALU FACADE SCREW

SELF DRILLING SCREW FOR FASTENING OF ALU SHEETS TO WOOD

- Drilling, tapping and fastening in one operation
- Hardened alu screw with reduced drill point #1
- PG: 5310 is supplied with Ø16 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- PG: 2105 is supplied with Ø14 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- The head and washer shape of the LP™ screw allows a slightly tilted angle of fastening without compromising the seal
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:5310 HWH ALU 5.5 X L #1 "A" HX8 ALU-16B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13109	HWH ALU 5.5 X 35 #1 "A" HX8 ALU-16B	ALU Ø16	Ø5.5	35	24.5	#1	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	250

MG:06 PG:2110 LP™ ALU 5.5 X L #1 TX20 M-ALU-14B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
16962	LP ALU 5.5 X 35 #1 TX20 M-ALU-14B	M-ALU Ø14	Ø5.5	35	23.5	#1	2 x 0.5 - 2 x 1.0	Ø9.1 TX20	250

APPLICATION



SELF DRILLING SCREWS

» for fastening in steel/alu constructions

		Page
STÅLSKRUER	CSH 4.0 X L #2 PH2	35
	HWH 4.8 X L #2+ "A" HX8 ALU-14B	36
	CORONA™ 4.8 X L #2+ TX20 EPDM-9.5B	36
	LP™ 4.8 X L #2+ TX20 M-ALU-14B	36
	HWH 5.5 X L #2+ "A" HX8 ALU-16B	37
	CORONA™ 5.5 X L #2+ TX20 EPDM-9.5B	37
	HWH 5.5 X L/L1 #2S "A" HX8 ALU-16B	38
	HWH 5.5 X L #2P+ "A" HX8 ALU-16B	39
	HFH 6.3 X L #3 "A" HX8	40
	HWH 6.3 X L #3 "A" HX8 ALU-16B	41
	HFH 6.3 X L #3 "A" HX8	42
	HWH 5.5 X L #5 "A" HX8 ALU-16B	43
	HFH 5.5 X L #5 "A" HX8	43
	HWH 6.3 X L #6 "A" HX10 TC ALU-16B	44
	HWH 6.3 X L #7 "A" HX10 ALU-16B	45
BI-METAL SKRUER	CSH RXB 3.9 X L #2 PH2	46
	HWH RXB 4.8 X L #2+ "RXB" HX8 RX-14B	47
	HWH RXB 5.5 X L #2+ "RXB" HX8 RX-16B	48
	CORONA™ RXB 5.5 X L #2+ TX20 EPDM-9.5B	49
	CORONA™ RX4B 5.5 X L #2+ TX20 EPDM-9.5B	49
	HWH RXB 5.5 X L #2P+ "RXB" HX8 RX-16B	50
	CORONA RXB 5.5 X L #2P+ TX20 EPDM-9.5B	50
	HWH RXB 5.5 X L #3 "RXB" HX8 RX-16B	51
	HWH RXB 5.5 X L #3 HX8 RX-16B	51
	HWH RXB 5.5 X L #5 "RXB" HX8 RX-16B	52
	CORONA™ RXB 5.5 X L #5 TX20 EPDM-9.5	52



SELF DRILLING SCREWS

» for fastening in steel/alu constructions

	Page
STAINLESS SCREWS	
PH RX 4.2 X L #2 TX20	53
PH RX 4.8 X L #2 TX25	53
PH RX 5.5 X L #2 TX25	54
HWH RX 4.8 X L #2 HX8	55
HWH RX 5.5 X L #2 HX8 RX-16G	55
MIH RX 4.2 X L #2 PH2	56
MH RX 5.5 X L #2 TX25 RX-12B	56
MH RX4 5.5 X L #2 TX25 RX4-12B	56
MIH RX 4.8 X L #4S TX20	57




SELF DRILL SCREW

SELF DRILLING SCREW FOR FASTENING TO STEEL

- Drilling, tapping and fastening in one operation
- Drill point designed for drilling in harder steel
- Countersunk head with PH recess
- Available with ZYTEC™ + for good corrosion resistance

PRODUCT RANGE



MG:06 PG:4490 CSH 4.0 X L #2 PH2



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10805	CSH 4.0 X 16 #2 PH2	Ø4.0	16	8.0	#2	1.5 - 3.0	Ø6.5 PH2	2000
17098	CSH 4.0 X 19 #2 PH2		19	11.0				1000

SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL 1.5 - 3.5 mm

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #2+
- Available with EPDM washer for better load distribution and increased sealing abilities
- The CORONA™ screw with TX20 recess is shaped so that the EPDM sealing ring is partly concealed after fastening
- PG 2310 and PG 2350 are surface treated with 20 µm zinc for good corrosion resistance
- PG 2240 is surface treated with ZYTEC™+ for good corrosion resistance
- Available in 500 colours (QUALICOAT certified quality powder)



European Technical Assessment
ETA-10/0021



Effective
Length



Corrosion
category



Hardened
steel

PRODUCT RANGE

MG:06 PG:2310 HWH 4.8 X L #2+ "A" HX8 ALU-14B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
*13110	HWH 4.8 X 20 #2+ "A" HX8	-	Ø4.8	20	9.5	#2+	1.5 - 3.5	Ø10.0 HEX 8.0	500
13111	HWH 4.8 X 20 #2+ "A" HX8 ALU-14B	ALU Ø14			6.5				250
*10336	HWH 4.8 X 25 #2+ "A" HX8	-		25	14.5				500
10339	HWH 4.8 X 25 #2+ "A" HX8 ALU-14B	ALU Ø14			11.5				250

*Not approved

MG:06 PG:2350 CORONA™ 4.8 X L #2+ TX20 EPDM-9.5B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
12421	CORONA 4.8 X 19 #2+ TX20 EPDM-9.5B	EPDM Ø9.5	Ø4.8	19	7.0	#2+	1.5 - 3.5	Ø13.8 TX20	250

MG:06 PG:2240 LP™ 4.8 X L #2+ TX20 M-ALU-14B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10293	LP 4.8 X 23 #2+ TX20 M-ALU-14B	M-ALU Ø14	Ø4.8	23	8.0	#2+	1.5 - 3.5	Ø9.1 TX20	250

APPLICATION



SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL 1.5 - 4.0 mm

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #2+
- The CORONA™ screw with TX20 recess is shaped so that the EPDM sealing ring is partly concealed after fastening
- Available with EPDM washer for better load distribution and increased sealing abilities
- Surface treated with 20 µm zinc
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:2420 HWH 5.5 X L #2+ "A" HX8 ALU-16B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
*10368	HWH 5.5 X 25 #2+ "A" HX8	-	Ø5.5	25	14.5	#2+	1.5 - 4.0	Ø10.0 HEX 8.0	250
10370	HWH 5.5 X 25 #2+ "A" HX8 ALU-16B	ALU Ø16			10.0				
*10266	HWH 5.5 X 38 #2+ "A" HX8	-		38	27.5				
12062	HWH 5.5 X 38 #2+ "A" HX8 ALU-16B	ALU Ø16			23.0				
*10265	HWH 5.5 X 50 #2+ "A" HX8	-		50	39.5				100
12101	HWH 5.5 X 50 #2+ "A" HX8 ALU-16B	ALU Ø16			35.0				

*Not approved

MG:06 PG:2340 CORONA™ 5.5 X L #2+ TX20 EPDM-9.5B




Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10216	CORONA 5.5 X 25 #2+ TX20 EPDM-9.5B	EPDM Ø9.5	Ø5.5	25	12.0	#2+	1.5 - 4.0	Ø13.8 TX20	250

APPLICATION

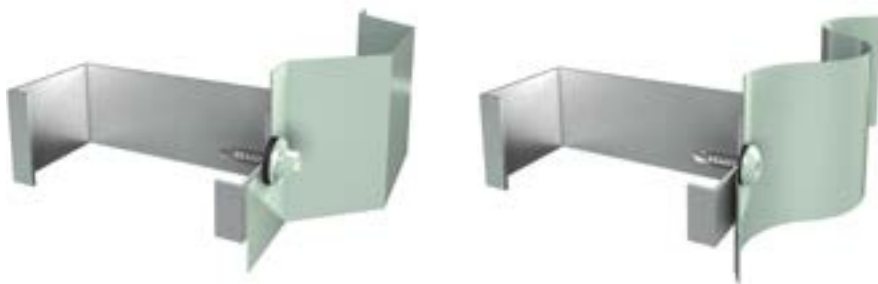

FACADE SCREW

SELF DRILLING SCREW FOR FASTENING OF SHEETS TO STEEL

- Drilling, tapping and fastening in one operation
- Supplied with Ø14 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available with ZYTEC™ M for good corrosion resistance
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:2421 HWH 5.5 X L/L1 #2S "A" HX8 ALU-16B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Material thickness [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
15294	HWH 5.5 X 45/27 #2S "A" HX8	-	Ø5.5	45	19-32	#2S	1.5 - 4.0	Ø10.0 HEX 8.0	250
17576	HWH 5.5 X 45/27 #2S "A" HX8 ALU-16B	ALU Ø16			16-29				150

SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL THROUGH A CORE MATERIAL

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #2P+
- Supplied with Ø16 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Surface treated with 20 µm zinc
- Available in 500 colours (QUALICOAT certified quality powder)



European Technical Assessment
ETA-10/0021



Effective
length



HX



Corrosion
category



Hardened
steel

PRODUCT RANGE

MG:06 PG:2425 HWH 5.5 X L #2P+ "A" HX8 ALU-16B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
*14283	HWH 5.5 X 60 #2P+ "A" HX8	-	Ø5.5	60	27.0	#2P+	1.5 - 4.0	Ø10.0 HEX 8.0	150
12437	HWH 5.5 X 60 #2P+ "A" HX8 ALU-16B	ALU Ø16			23.5				500

*Not approved


APPLICATION



SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL 1.25 - 6.0 mm

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #3
- Large flange under the head for better load distribution
- Surface treated with 10 µm zinc
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE


MG:06 PG:7960 HFH 6.3 X L #3 "A" HX8



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13045	HFH 6.3 X 19 #3 "A" HX8	Ø6.3	19	6.5	#3	1.25* - 6.0	Ø14.0 HEX 8.0	250
10394	HFH 6.3 X 25 #3 "A" HX8		25	12.5				
13046	HFH 6.3 X 38 #3 "A" HX8		38	25.5				

*) If steel substructure less than 3.5 mm the pull-out value should be verified by tests


APPLICATION

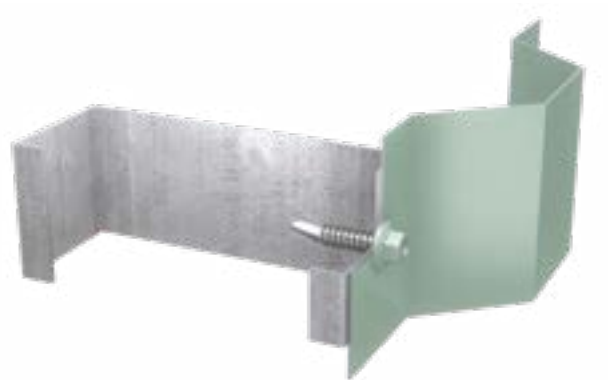

SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL 1.3 - 6.4 mm

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #3
- Supplied with Ø16 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Surface treated with 20 µm zinc
- Available in 500 colours (QUALICOAT certified powder)




PRODUCT RANGE

MG:06 PG:2430 HWH 6.3 X L #3 "A" HX8 ALU-16B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13155	HWH 6.3 X 25 #3 "A" HX8	-	Ø6.3	25	12.5	#3	1.25* - 6.4	Ø10.0 HEX 8.0	250
13156	HWH 6.3 X 25 #3 "A" HX8 ALU-16B	ALU Ø16			9.0				
19208	HWH 6.3 X 32 #3 "A" HX8	-		32	19.5				
19209	HWH 6.3 X 32 #3 "A" HX8 ALU-16B	ALU-16B			16.0				
19212	HWH 6.3 X 38 #3 "A" HX8	-		38	25.5				
19213	HWH 6.3 X 38 #3 "A" HX8 ALU-16B	ALU-16B			22.0				
19216	HWH 6.3 X 64 #3 "A" HX8	-		64	51.5				
19217	HWH 6.3 X 64 #3 "A" HX8 ALU-16B	ALU-16B			48.0				

^{*)} If steel substructure less than 3.5 mm the pull-out value should be verified by tests

APPLICATION



SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL 3.5 - 8.0 mm

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #4
- Surface treated with ZYTEC™ M for optimal corrosion protection
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:7970 HFH 6.3 X L #4 "A" HX8



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13047	HFH 6.3 X 21 #4 "A" HX8	Ø6.3	21	6.0	#4	3.5 - 8.0	Ø14.0 HEX 8.0	250
13048	HFH 6.3 X 38 #4 "A" HX8		38	23.0				


APPLICATION



SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL 4.0 - 12.5 mm

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #5
- 062390: Available with Ø16 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Surface treated with ZYTEC™ M for optimal corrosion protection
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:2390 HWH 5.5 X L #5 "A" HX8 TC ALU-16B



Download
Technical data sheet



European Technical Assessment
ETA-10/0021



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
*12890	HWH 5.5 X 32 #5 "A" HX8 TC	-	Ø5.5	32	12.5	#5	4.0 - 12.5	Ø10.0 HEX 8.0	250
12877	HWH 5.5 X 32 #5 "A" HX8 TC ALU-16B	ALU Ø16			9.0				200
*10208	HWH 5.5 X 38 #5 "A" HX8 TC	-		38	18.5				250
12092	HWH 5.5 X 38 #5 "A" HX8 TC ALU-16B	ALU Ø16			15.0				150
*12891	HWH 5.5 X 51 #5 "A" HX8 TC	-		51	31.5				500
12878	HWH 5.5 X 51 #5 "A" HX8 TC ALU-16B	ALU Ø16			28.0				
*12892	HWH 5.5 X 76 #5 "A" HX8 TC	-		76	56.5				250
12879	HWH 5.5 X 76 #5 "A" HX8 TC ALU-16B	ALU Ø16			53.0				
*12893	HWH 5.5 X 102 #5 "A" HX8 TC	-		102	82.5				150
12880	HWH 5.5 X 102 #5 "A" HX8 TC ALU-16B	ALU Ø16			79.0				

*Not approved



Download
Technical data sheet

MG:06 PG:2395 HFH 5.5 X L #5 "A" HX8



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
16170	HFH 5.5 X 32 #5 "A" HX8	Ø5.5	32	12.5	#5	4.0 - 12.5	Ø15.0 HEX 8.0	250


APPLICATION



SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL 4.0 - 14.0 mm

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #6
- Available with Ø16 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Surface treated with ZYTEC™ M for optimal corrosion protection
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:7900 HWH 6.3 X L #6 "A" HX10 TC ALU-16B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{eff} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
16379	HWH 6.3 X 38 #6 "A" HX10 TC	-	Ø6.3	38	16.0	#6	4.0 - 14.0	Ø13.0 HEX 10.0	200
16380	HWH 6.3 X 38 #6 "A" HX10 TC ALU-16B	ALU Ø16			12.5				

APPLICATION




SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL 6.0 - 22.5 mm

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #7
- Available with Ø16 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Surface treated with ZYTEC™ M for optimal corrosion protection
- Available in 500 colours (QUALICOAT certified quality powder)

PRODUCT RANGE



MG:06 PG:2405 HWH 6.3 X L #7 "A" HX10 ALU-16B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
16160	HWH 6.3 X 55 #7 "A" HX10	-	Ø6.3	55	27.0	#7	6.0 - 22.5	Ø13.0 HEX 10.0	100
16525	HWH 6.3 X 55 #7 "A" HX10 ALU-16B	ALU Ø16			23.5				


APPLICATION



BI-METAL SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING WALL CLADDING TO STEEL

- Typically used for fastening of fiber cement cladding to purlins
- Stainless steel screw A2 with drill point #2 in hardened steel
- Countersunk head with Phillips recess
- PG: 7240 with ribs for milling feature



PRODUCT RANGE

MG:06 PG:7230 CSH RXB 3.9 X L #2 PH2



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
12039	CSH RXB 3.9 X 16 #2 PH2	Ø3.9	16	4.0	#2	Max. 2.5	Ø7.4 PH2	1000
12043	CSH RXB 3.9 X 19 #2 PH2		19	7.0				
19015	CSH RXB 3.9 X 25 #2 PH2		25	13.0				

APPLICATION



BI-METAL SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL 1.5 - 3.5 mm

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with drill point #2+ in hardened steel
- Available with Ø14 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available in 500 colours (QUALICOAT certified powder)



European Technical Assessment
ETA-10/0021



Effective
Length



HX



Corrosion
category



Bi-metal
stainless A2

PRODUCT RANGE



Download
Technical data sheet

MG:06 PG:2535 HWH RXB 4.8 X L #2+ "RXB" HX8 RX-14B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{eff} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
*12662	HWH RXB 4.8 X 20 #2+ "RXB" HX8	-	Ø4.8	20	6.0	#2+	1.5 - 3.5	Ø10.0 HEX 8.0	250
12663	HWH RXB 4.8 X 20 #2+ "RXB" HX8 RX-14B	A2 Ø14			2.5				

*Not approved

APPLICATION



BI-METAL SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING TO STEEL

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with drill point #2+ made of hardened steel
- Good corrosion resistance
- Available with Ø16 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available in 500 colours (QUALICOAT certified quality powder)



European Technical Assessment
ETA-10/0021



Effective
length



HX



Corrosion
category



Bi-metal
stainless A2

PRODUCT RANGE



Download
Technical data sheet



MG:06 PG:2530 HWH RXB 5.5 X L #2+ "RXB" HX8 RX-16B

Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
*10452	HWH RXB 5.5 X 25 #2+ "RXB" HX8	-	Ø5.5	25	8.5	#2+	1.5 - 4.0	Ø10.0 HEX 8.0	250
10454	HWH RXB 5.5 X 25 #2+ "RXB" HX8 RX-16B	A2 Ø16			5.5				
*15698	HWH RXB 5.5 X 38 #2+ "RXB" HX8	-		38	21.5				200
15699	HWH RXB 5.5 X 38 #2+ "RXB" HX8 RX-16B	A2 Ø16			18.5				250
*16524	HWH RXB 5.5 X 60 #2+ "RXB" HX8	-		60	43.5				100
16772	HWH RXB 5.5 X 60 #2+ "RXB" HX8 RX-16B	A2 Ø16			40.5				

*Not approved

APPLICATION



BI-METAL SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING TO STEEL

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2/A4 with drill point #2+ made of hardened steel
- Available with EPDM washer for better load distribution and increased sealing abilities
- The CORONA™ screw is shaped so that the EPDM sealing ring is partly concealed after fastening
- Available in 500 colours (QUALICOAT certified quality powder)



European Technical Assessment
ETA-10/0021

Effective
length

TX

PRODUCT RANGE

MG:06 PG:2670 CORONA™ RXB 5.5 X L #2+ TX20 EPDM-9.5B



Download
Technical data sheet



Corrosion
category



Bi-metal
stainless A2



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10493	CORONA RXB 5.5 X 25 #2+ TX20 EPDM-9.5B	EPDM Ø9.5	Ø5.5	25	7.5	#2+	1.5 - 4.0	Ø13.8 TX20	250
18116	CORONA RXB 5.5 X 38 #2+ TX20 EPDM-9.5B			38	20.5				



Download
Technical data sheet



Corrosion
category



Bi-metal
stainless A4



MG:06 PG:2675 CORONA™ RX4B 5.5 X L #2+ TX20 EPDM-9.5B

Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
17840	CORONA RX4B 5.5 X 32 #2+ TX20 EPDM-9.5B	EPDM Ø9.5	Ø5.5	32	15.0	#2+	1.5 - 4.0	Ø13.8 TX20	200


APPLICATION



BI-METAL SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL THROUGH A CORE MATERIAL

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with drill point #2P+
- Available with EPDM washer for better load distribution and increased sealing abilities
- The CORONA™ screw is shaped so that the EPDM sealing ring is partly concealed after fastening
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:2540 HWH RXB 5.5 X L #2P+ "RXB" HX8 RX-16B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10456	HWH RXB 5.5 X 42 #2P+ "RXB" HX8 RX-16B	A2 Ø16	Ø5.5	42	14.0	#2P+	1.5 - 5.0	Ø10.0 HEX 8.0	100
10458	HWH RXB 5.5 X 56 #2P+ "RXB" HX8 RX-16B			56	22.0				

MG:06 PG:2680 CORONA™ RXB 5.5 X L #2P+ TX20 EPDM-9.5B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10494	CORONA RXB 5.5 X 42 #2P+ TX20 EPDM-9.5B	EPDM Ø9.5	Ø5.5	42	15.5	#2P+	1.5 - 4.0	Ø13.8 TX20	200
10495	CORONA RXB 5.5 X 56 #2P+ TX20 EPDM-9.5B			56	23.5				150


APPLICATION



BI-METAL DRILL SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL

- Drilling, tapping and fastening in one operation
- Drill point #3 for drilling in harder steel
- Available in 500 colours (QUALICOAT certified facade quality powder)



Effective length



HX



Corrosion category



Bi-metal stainless A2

PRODUCT RANGE

MG:06 PG:2532 HWH RXB 5.5 X L #3 "RXB" HX8 RX-16B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
18358	HWH RXB 5.5 X 26 #3 "RXB" HX8	-	Ø5.5	26	11.0	#3	1.5 - 6.0	Ø10.0 HEX 8.0	250
18399	HWH RXB 5.5 X 26 #3 "RXB" HX8 RX-16B	A2 Ø16			7.5				
18359	HWH RXB 5.5 X 38 #3 "RXB" HX8	-		38	23.0				200
18401	HWH RXB 5.5 X 38 #3 "RXB" HX8 RX-16B	A2 Ø16			19.5				

MG:06 PG:2531 HWH RXB 5.5 X L #3 HX8 RX-16B



Download
Technical data sheet



European Technical Assessment
ETA-11/0174



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
*13358	HWH RXB 5.5 X 26 #3 HX8	-	Ø5.5	26	13.0	#3	2.0 - 6.0	Ø10.0 HEX 8.0	250
13404	HWH RXB 5.5 X 26 #3 HX8 RX-16B	A2 Ø16			9.0				
*17851	HWH RXB 5.5 X 38 #3 HX8	-		38	25.0				
17852	HWH RXB 5.5 X 38 #3 HX8 RX-16B	A2 Ø16			21.0				

*Not approved

APPLICATION



BI-METAL SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF STEEL 4.0 - 12.5 mm

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with drill point #5
- Available with EPDM washer for better load distribution and increased sealing abilities
- The CORONA™ screw is shaped so that the EPDM sealing ring is partly concealed after fastening
- Available in 500 colours (QUALICOAT certified powder)



European Technical Assessment
ETA-10/0021



Effective
Length



Corrosion
category



Bi-metal
stainless A2

PRODUCT RANGE

MG:06 PG:2550 HWH RXB 5.5 X L #5 "RXB" HX8 RX-16B



Download
Technical data sheet



HX



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
*16338	HWH RXB 5.5 X 40 #5 "RXB" HX8	-	Ø5.5	40	12.0	#5	4.0 - 12.5	Ø10.0 HEX 8.0	250
16339	HWH RXB 5.5 X 40 #5 "RXB" HX8 RX-16B	A2 Ø16			8.5				200
*16342	HWH RXB 5.5 X 65 #5 "RXB" HX8	-		65	37.0				150
16343	HWH RXB 5.5 X 65 #5 "RXB" HX8 RX-16B	A2 Ø16			33.5				100
*16344	HWH RXB 5.5 X 80 #5 "RXB" HX8	-		80	52.0				100
16345	HWH RXB 5.5 X 80 #5 "RXB" HX8 RX-16B	A2 Ø16			48.5				

*Not approved



Download
Technical data sheet



TX



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10496	CORONA RXB 5.5 X 40#5 TX20 TC EPDM-9.5B	EPDM Ø9.5	Ø5.5	40	10.5	#5	4.0 - 12.5	Ø13.8 TX20	250
13821	CORONA RXB 5.5 X 60#5 TX20 TC EPDM-9.5B			60	30.5				100


APPLICATION



STAINLESS SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF ALUMINIUM

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with drill point #2
- The screws should not be mounted in steel
- DIN 7504M



PRODUCT RANGE

MG:06 PG:6220 PH RX 4.2 X L #2 TX20



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
12185	PH RX 4.2 X 13 #2 TX20	Ø4.2	13	4.5	#2	1.75 - 3.0	Ø8.2 TX20	1000
12186	PH RX 4.2 X 16 #2 TX20		16	7.5				
15581	PH RX 4.2 X 19 #2 TX20		19	10.5				
12187	PH RX 4.2 X 25 #2 TX20		25	16.5				
18567	PH RX 4.2 X 38 #2 TX20		38	29.5				

MG:06 PG:6230 PH RX 4.8 X L #2 TX25



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
12188	PH RX 4.8 X 13 #2 TX25	Ø4.8	13	4.0	#2	1.75 - 4.4	Ø9.5 TX25	1000
12189	PH RX 4.8 X 16 #2 TX25		16	7.0				500
12190	PH RX 4.8 X 19 #2 TX25		19	10.0				
12191	PH RX 4.8 X 25 #2 TX25		25	16.0				
12192	PH RX 4.8 X 32 #2 TX25		32	23.0				
12193	PH RX 4.8 X 38 #2 TX25		38	29.0				200
12194	PH RX 4.8 X 50 #2 TX25		50	41.0				
19133	PH RX 4.8 X 60 #2 TX25		60	51.0				100
19135	PH RX 4.8 X 80 #2 TX25		80	71.0				

APPLICATION



STAINLESS DRILL SCREW

SELF DRILLING SCREW FOR FASTENING OF POROUS MATERIAL

- Only for use in porous materials
- Drilling, tapping and fastening in one operation
- Screw with Pan head and TX recess
- Stainless steel with quality A2
- Drill point #2



PRODUCT RANGE

MG:06 PG:6235 PH RX 5.5 X L #2 TX25



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
18927	PH RX 5.5 X 16 #2 TX25	Ø5.5	16	5.0	#2	1.75 - 5.25	Ø10.8 TX25	1000
15846	PH RX 5.5 X 19 #2 TX25		19	8.0				
15956	PH RX 5.5 X 25 #2 TX25		25	14.0				
16784	PH RX 5.5 X 38 #2 TX25		38	27.0				500


APPLICATION



STAINLESS SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF ALUMINIUM

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with drill point #2
- The screws should not be mounted in steel
- Tall head for easy and stable mounting



PRODUCT RANGE

MG:06 PG:6155 HWH RX 4.8 X L #2 "A2" HX8



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
18934	HWH RX 4.8 X 13 #2 "A2" HX8	Ø4.8	13	4.5	#2	1.75 - 4.40	Ø10.0 HEX 8.0	500
19139	HWH RX 4.8 X 16 #2 "A2" HX8		16	7.5				
18297	HWH RX 4.8 X 19 #2 "A2" HX8		19	10.5				
19140	HWH RX 4.8 X 22 #2 "A2" HX8		22	13.5				
19141	HWH RX 4.8 X 25 #2 "A2" HX8		25	16.5				




Download
Technical data sheet

MG:06 PG:6170 HWH RX 5.5 X L #2 HX8 RX-16G



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
12178	HWH RX 5.5 X 25 #2 HX8	-	Ø5.5	25	14.5	#2	1.75 - 5.25	Ø10.0 HEX 8.0	500
16055	HWH RX 5.5 X 25 #2 HX8 RX-16G	A2 Ø16			11.0				250
12180	HWH RX 5.5 X 38 #2 HX8	-		38	27.5				250
16899	HWH RX 5.5 X 38 #2 HX8 RX-16G	A2 Ø16			24.0				200
16769	HWH RX 5.5 X 70 #2 HX8	-		70	59.5				400
16770	HWH RX 5.5 X 70 #2 HX8 RX-16G	A2 Ø16			56.0				

APPLICATION

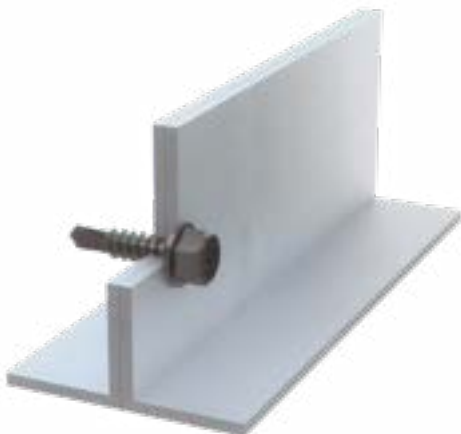

STAINLESS SELF DRILLING SCREW

SELF DRILLING SCREW FOR FASTENING OF ALUMINIUM

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2/A4 with drill point #2
- PG:6110 with Ø6.0 mm Mini head
- The screws should not be mounted in steel



PRODUCT RANGE

MG:06 PG:6110 MIH RX 4.2 X L #2 PH2



Download
Technical data sheet



PH



Corrosion
category



Stainless
steel A2



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
12065	MIH RX 4.2 X 11.5 #2 PH2	Ø4.2	11.5	3.5	#2	1.0 - 2.0	Ø5.8 PH2	1000
12066	MIH RX 4.2 X 16 #2 PH2		16.0	8.0				

MG:06 PG:6120 MH RX 5.5 X L #2 TX25 RX-12B



Download
Technical data sheet



TX



Corrosion
category



Stainless
steel A2



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
12067	MH RX 5.5 X 25 #2 TX25	-	Ø5.5	25.0	12.5	#2	1.5 - 3.5	Ø12.0 TX25	250
19774	MH RX 5.5 X 25 #2 TX25 RX-12B	A2 Ø12			9.0				

MG:06 PG:6121 MH RX4 5.5 X 25 #2 TX25 RX4-12B



Download
Technical data sheet



TX



Corrosion
category




Stainless
steel A4



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
17388	MH RX4 5.5 X 25 #2 TX25	-	Ø5.5	25.0	12.5	#2	1.5 - 3.5	Ø12.0 TX25	250
17391	MH RX4 5.5 X 25 #2 TX25 RX4-12B	A4 Ø12			9.0				

APPLICATION

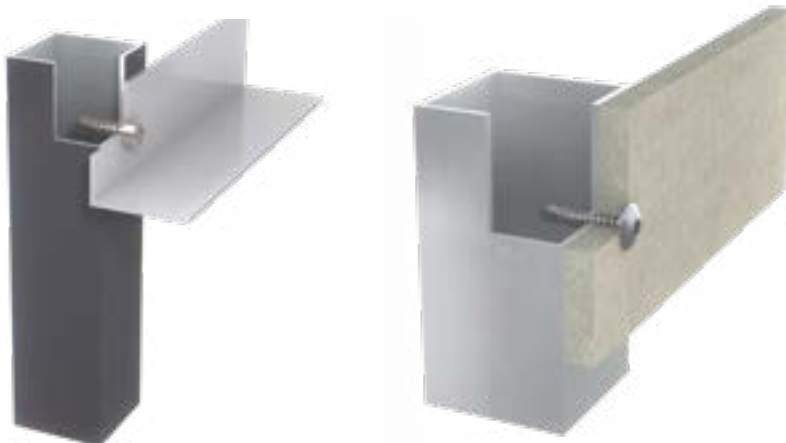

STAINLESS DRILL SCREW

SELF DRILLING SCREW FOR FASTENING OF ALUMINIUM

- Drilling, tapping and fastening in one operation
- The screws should not be mounted in steel
- Good corrosion resistance



Effective length



TX



Corrosion category



Stainless steel A2

PRODUCT RANGE

MG:06 PG:7691 MIH RX 4.8 X L #4S TX20

Download
Technical data sheet

Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
17945	MIH RX 4.8 X 25 #4S TX20	Ø4.8	25	10.5	#4S	2.0 - 6.0	Ø7.2 TX20	500

SANDWICH PANEL SCREWS

» for fastening of sandwich panels

	Page
STEEL SCREWS	
HWH 6.5/7.0 X L #1 "A" HX8 ALU-19B	59
HWH 5.5/6.3 X L #2+ "A" HX8 ALU-19B	60
HWH 5.5/6.3 X L #5 "A" HX8 ALU-19B	61
HWH HELIX 5.5/6.3 X L #7 "A" HX8 ALU-19B	62
HWH 7.5/8.0 X L "A" HX8 ALU-19B	63
BI-METAL SCREWS	
HWH RXB 6.5/7.0 X L #1 "RXB" HX8 RX-19B	64
HWH RXB 5.5/6.3 X L #2 "RXB" HX8 RX-19B	65
HWH RXB 5.5/6.3 X L #5 "RXB" HX8 RX-19B	66
HWH HELIX RXB D1/D2 X L #7 "RXB" HX8 RX-19B	67



SANDWICH PANEL SCREW

SELF DRILLING SCREW FOR FASTENING OF SANDWICH PANELS TO WOOD AND STEEL

- Drilling, tapping and fastening in one operation
- Hardened steel screw with reduced drill point #1
- High thread at the head with "free spin" for better grip in the sheet. Protects the sheet – no deformation
- Supplied with Ø19 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available with stainless steel washer Ø22, Ø25 and Ø29 mm
- Surface treated with ZYTEC™ M
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:1000 HWH 6.5/7.0 X L #1 "A" HX8 ALU-19B




Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Panel thickness on wood [mm]	Panel thickness on steel [mm]	Drill cap. [mm]	Head [mm]	Unit [pcs]
13605	HWH 6.5/7.0 X 110 #1 "A" HX8 ALU-19B	ALU Ø19	Ø6.5	110	max. 60	48 - 95	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	100
17819	HWH 6.5/7.0 X 150 #1 "A" HX8 ALU-19B			150	max. 100	68 - 135			
17821	HWH 6.5/7.0 X 170 #1 "A" HX8 ALU-19B			170	max. 120	88 - 155			
17823	HWH 6.5/7.0 X 210 #1 "A" HX8 ALU-19B			210	max. 160	128 - 195			
13609	HWH 6.5/7.0 X 250 #1 "A" HX8 ALU-19B			250	max. 200	168 - 235			
13610	HWH 6.5/7.0 X 300 #1 "A" HX8 ALU-19B			300	max. 250	218 - 285			
13611	HWH 6.5/7.0 X 350 #1 "A" HX8 ALU-19B			350	max. 300	268 - 335			



Download
Technical data sheet

APPLICATION

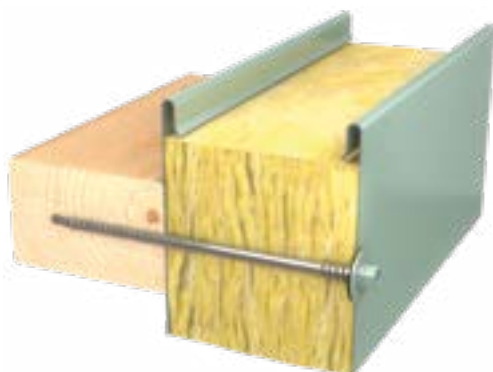

- The screw drill through the sandwich panel and then the wood / steel substrate
- The high thread at the head locks the sheet to prevent deformation
- The cone below the head ensure maximum sealling between the screw head, washer and sandwich panel.
- Free-spin function of the thread just below the head avoiding the spinning thread from locking through the hole in the outer panel sheet, - and thereby maintaining the assembly and pressure between sheet and washer

SANDWICH PANEL SCREW

SELF DRILLING SCREW FOR FASTENING OF SANDWICH PANELS TO STEEL

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #2+
- High thread at the head with "free spin" for better grip in the sheet. Protects the sheet – no deformation
- Supplied with Ø19 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available with stainless steel washer Ø22, Ø25 and Ø29 mm
- Surface treated with ZYTEC™ M for optimal corrosion protection
- Available in 500 colours (QUALICOAT certified powder)

PRODUCT RANGE



MG:06 PG:1005 HWH 5.5/6.3 X L #2+ "A" HX8 ALU-19B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Panel thickness [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13612	HWH 5.5/6.3 X 60 #2+ "A" HX8 ALU-19B	ALU Ø19	Ø5.5	60	18 - 40	#2+	1.5 - 4.0	Ø10.0 HEX 8.0	100
13613	HWH 5.5/6.3 X 80 #2+ "A" HX8 ALU-19B			80	18 - 60				
13614	HWH 5.5/6.3 X 100 #2+ "A" HX8 ALU-19B			100	18 - 80				
13616	HWH 5.5/6.3 X 145 #2+ "A" HX8 ALU-19B			145	63 - 125				
13617	HWH 5.5/6.3 X 180 #2+ "A" HX8 ALU-19B			180	98 - 160				
13618	HWH 5.5/6.3 X 230 #2+ "A" HX8 ALU-19B			230	148 - 210				
13619	HWH 5.5/6.3 X 280 #2+ "A" HX8 ALU-19B			280	198 - 260				
13620	HWH 5.5/6.3 X 330 #2+ "A" HX8 ALU-19B			330	248 - 310				



Download
Technical data sheet

APPLICATION



- The screw drill through the sandwich panel and then the steel substrate
- The high thread at the head locks the sheet to prevent deformation
- The cone below the head ensure maximum sealling between the screw head, washer and sandwich panel.
- Free-spin function of the thread just below the head avoiding the spinning thread from locking through the hole in the outer panel sheet, - and thereby maintaining the assembly and pressure between sheet and washer

SANDWICH PANEL SCREW

SELF DRILLING SCREW FOR FASTENING OF SANDWICH PANELS TO STEEL

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #5
- High thread at the head with "free spin" for better grip in the sheet. Protects the sheet – no deformation
- Supplied with Ø19 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available with stainless steel washer Ø22, Ø25 and Ø29 mm
- Surface treated with ZYTEC™ M for optimal corrosion protection
- Available in 500 colours (QUALICOAT certified powder)



European Technical Assessment
ETA-20/0709



Corrosion
category



Hardened
steel

PRODUCT RANGE

MG:06 PG:1010 HWH 5.5/6.3 X L #5 "A" HX8 ALU-19B




Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Panel thickness [mm]	Drill pont	Drill cap. [mm]	Head [mm]	Unit [pcs]
13621	HWH 5.5/6.3 X 80 #5 "A" HX8 ALU-19B	ALU Ø19	Ø5.5	80	18 - 46	#5	4.0 - 12.5	Ø10.0 HEX 8.0	100
13622	HWH 5.5/6.3 X 100 #5 "A" HX8 ALU-19B			100	18 - 66				
13623	HWH 5.5/6.3 X 120 #5 "A" HX8 ALU-19B			120	38 - 86				
13624	HWH 5.5/6.3 X 140 #5 "A" HX8 ALU-19B			140	38 - 106				
13625	HWH 5.5/6.3 X 165 #5 "A" HX8 ALU-19B			165	63 - 131				
20479	HWH 5.5/6.3 X 195 #5 "A" HX8 ALU-19B			195	93 - 161				
13628	HWH 5.5/6.3 X 240 #5 "A" HX8 ALU-19B			240	138 - 206				
13629	HWH 5.5/6.3 X 290 #5 "A" HX8 ALU-19B			290	188 - 256				
13630	HWH 5.5/6.3 X 340 #5 "A" HX8 ALU-19B			340	238 - 306				



Download
Technical data sheet

APPLICATION

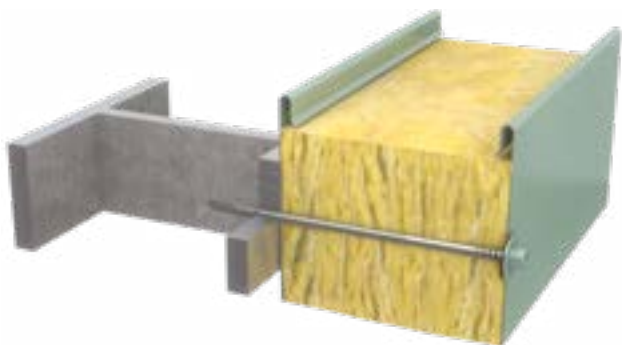

- The screw drill through the sandwich panel and then the steel substrate
- The high thread at the head locks the sheet to prevent deformation

- The cone below the head ensure maximum sealling between the screw head, washer and sandwich panel.
- Free-spin function of the thread just below the head avoiding the spinning thread from locking through the hole in the outer panel sheet, - and thereby maintaining the assembly and pressure between sheet and washer

SANDWICH PANEL SCREW

SELF DRILLING SCREW FOR FASTENING OF SANDWICH PANELS TO STEEL

- Drilling, tapping and fastening in one operation
- Hardened steel screw with drill point #7
- High thread at the head with "free spin" for better grip in the sheet. Protects the sheet – no deformation
- Supplied with Ø19 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available with stainless steel washer Ø22, Ø25 and Ø29 mm
- Surface treated with ZYTEC™ M for optimal corrosion protection
- Available in 500 colours (QUALICOAT certified powder)

PRODUCT RANGE



MG:06 PG:2400 HWH HELIX 5.5/6.3 X L #7 "A" HX8 ALU-19B




Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Panel thickness [mm]	Drill cap. [mm]	Head [mm]	Unit [pcs]
15852	HWH HELIX 5.5/6.3 X 150 #7 "A" HX8 ALU-19B	ALU Ø19	Ø5.5	150	38 - 105	6.0 - 22.5	Ø10.0 HEX 8.0	100
13632	HWH HELIX 5.5/6.3 X 200 #7 "A" HX8 ALU-19B			200	88 - 155			
13633	HWH HELIX 5.5/6.3 X 250 #7 "A" HX8 ALU-19B			250	138 - 205			
13634	HWH HELIX 5.5/6.3 X 300 #7 "A" HX8 ALU-19B			300	188 - 255			
13635	HWH HELIX 5.5/6.3 X 350 #7 "A" HX8 ALU-19B			350	238 - 305			



Download
Technical data sheet

APPLICATION

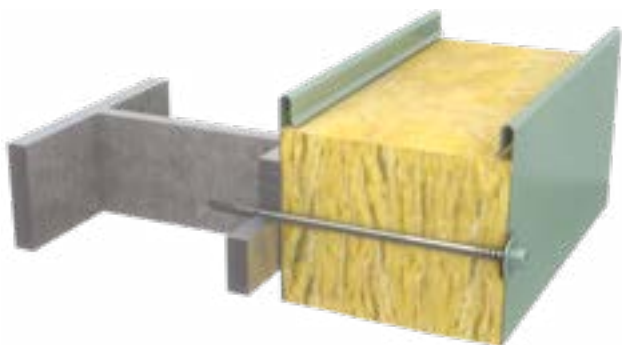

- The screw drill through the sandwich panel and then the steel substrate
- The high thread at the head locks the sheet to prevent deformation
- The cone below the head ensure maximum sealling between the screw head, washer and sandwich panel.
- Free-spin function of the thread just below the head avoiding the spinning thread from locking through the hole in the outer panel sheet, - and thereby maintaining the assembly and pressure between sheet and washer

SANDWICH PANEL SCREW

SELF DRILLING SCREW FOR FASTENING OF SANDWICH PANELS TO CONCRETE

- High thread at the head with "free spin" for better grip in the sheet. Protects the sheet – no deformation
- Supplied with Ø19 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available with stainless steel washer Ø22, Ø25 and Ø29 mm
- Universal solution, can be used in many different materials; concrete, lightweight concrete and brick walls/masonry etc.
- Pre-drilling by Ø6.0 mm in bricks and Ø6.5 mm in concrete
- Timesaving installation - fastens without plugs
- Surface treated with ZYTEC™ M for optimal corrosion protection
- Available in 500 colours (QUALICOAT certified powder)



HX

Corrosion
categoryHardened
steel

PRODUCT RANGE

MG:06 PG:2446 HWH 7.5/8.0 X L "A" HX8 ALU-19B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Panel thickness [mm]	Head [mm]	Unit [pcs]
18439	HWH 7.5/8.0 X 150 "A" HX8 ALU-19B	ALU Ø19	Ø7.5	150	104	Ø10.0 HEX 8.0	100
15372	HWH 7.5/8.0 X 200 "A" HX8 ALU-19B			200	154		
15374	HWH 7.5/8.0 X 250 "A" HX8 ALU-19B			250	204		
15376	HWH 7.5/8.0 X 300 "A" HX8 ALU-19B			300	254		
15378	HWH 7.5/8.0 X 350 "A" HX8 ALU-19B			350	304		

Download
Technical data sheet

APPLICATION



- The screw is mounted in the pre-drilled hole through the sandwich panel and into the concrete / brick
- The high thread at the head locks the sheet to prevent deformation
- The cone below the head ensure maximum sealling between the screw head, washer and sandwich panel.
- Free-spin function of the thread just below the head avoiding the spinning thread from locking through the hole in the outer panel sheet, - and thereby maintaining the assembly and pressure between sheet and washer

BI-METAL SANDWICH PANEL SCREW

SELF DRILLING SCREW FOR FASTENING OF SANDWICH PANELS TO WOOD AND STEEL

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with reduced drill point #1 in hardened steel
- High thread at the head with "free spin" for better grip in the sheet. Protects the sheet – no deformation
- Supplied with Ø19 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available with stainless steel washer Ø22, Ø25 and Ø29 mm
- Available in 500 colours (QUALICOAT certified powder)



HX

Corrosion
categoryBi-metal
stainless A2

PRODUCT RANGE


MG:06 PG:1015 HWH RXB 6.5/7.0 X L #1 "RXB" HX8 RX-19B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Panel thickness on wood [mm]	Panel thickness on steel [mm]	Drill cap. [mm]	Head [mm]	Unit [pcs]
13637	HWH RXB 6.5/7.0 X 115 #1 "RXB" HX8 RX-19B	A2 Ø19	Ø6.5	115	max. 60	53 - 91	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	100
18202	HWH RXB 6.5/7.0 X 155 #1 "RXB" HX8 RX-19B			155	max. 100	73 - 131			
18204	HWH RXB 6.5/7.0 X 175 #1 "RXB" HX8 RX-19B			175	max. 120	93 - 151			
18206	HWH RXB 6.5/7.0 X 215 #1 "RXB" HX8 RX-19B			215	max. 160	133 - 191			
13641	HWH RXB 6.5/7.0 X 255 #1 "RXB" HX8 RX-19B			255	max. 200	173 - 231			

Download
Technical data sheet

APPLICATION

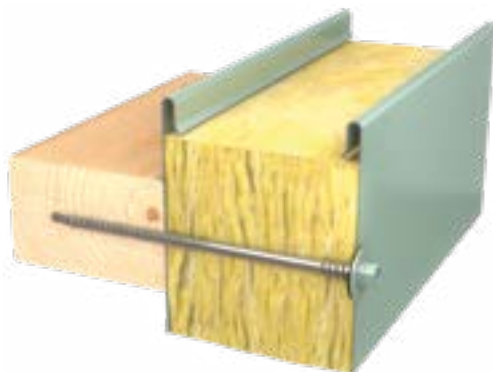

- The screw drill through the sandwich panel and then the wood / steel substrate
- The high thread at the head locks the sheet to prevent deformation
- The cone below the head ensure maximum sealling between the screw head, washer and sandwich panel.
- Free-spin function of the thread just below the head avoiding the spinning thread from locking through the hole in the outer panel sheet, - and thereby maintaining the assembly and pressure between sheet and washer

BI-METAL SANDWICH PANEL SCREW

SELF DRILLING SCREW FOR FASTENING OF SANDWICH PANELS TO STEEL

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with drill point #2 in hardened steel
- High thread at the head with "free spin" for better grip in the sheet. Protects the sheet – no deformation
- Supplied with Ø19 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available with stainless steel washer Ø22, Ø25 and Ø29 mm
- Good corrosion resistance
- Available in 500 colours (QUALICOAT certified powder)



European Technical Assessment
ETA-20/0709



Corrosion
category



Bi-metal
stainless A2

PRODUCT RANGE

MG:06 PG:1020 HWH RXB 5.5/6.3 X L #2 "RXB" HX8 RX-19B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Panel thickness [mm]	Drill cap. [mm]	Head [mm]	Unit [pcs]
13644	HWH RXB 5.5/6.3 X 90 #2 "RXB" HX8 RX-19B	A2 Ø19	Ø5.5	90	28 - 66	1.5 - 4.0	Ø10.0 HEX 8.0	100
13645	HWH RXB 5.5/6.3 X 110 #2 "RXB" HX8 RX-19B			110	28 - 86			
13646	HWH RXB 5.5/6.3 X 130 #2 "RXB" HX8 RX-19B			130	48 - 106			
13647	HWH RXB 5.5/6.3 X 155 #2 "RXB" HX8 RX-19B			155	73 - 131			
13648	HWH RXB 5.5/6.3 X 180 #2 "RXB" HX8 RX-19B			180	98 - 156			
13649	HWH RXB 5.5/6.3 X 230 #2 "RXB" HX8 RX-19B			230	128 - 206			
13650	HWH RXB 5.5/6.3 X 280 #2 "RXB" HX8 RX-19B			280	178 - 256			



Download
Technical data sheet

APPLICATION



- The screw drill through the sandwich panel and then the steel substrate
- The high thread at the head locks the sheet to prevent deformation

- The cone below the head ensure maximum sealling between the screw head, washer and sandwich panel.
- Free-spin function of the thread just below the head avoiding the spinning thread from locking through the hole in the outer panel sheet, - and thereby maintaining the assembly and pressure between sheet and washer

BI-METAL SANDWICH PANEL SCREW

SELF DRILLING SCREW FOR FASTENING OF SANDWICH PANELS TO STEEL

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with drill point #5 in hardened steel
- High thread at the head with "free spin" for better grip in the sheet. Protects the sheet – no deformation
- Supplied with Ø19 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available with stainless steel washer Ø22, Ø25 and Ø29 mm
- Good corrosion resistance
- Available in 500 colours (QUALICOAT certified powder)



European Technical Assessment
ETA-20/0709



Corrosion
category
Bi-metal
stainless A2

PRODUCT RANGE

MG:06 PG:1025 HWH RXB 5.5/6.3 X L #5 "RXB" HX8 RX-19B




Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Panel thickness [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13657	HWH RXB 5.5/6.3 X 110 #5 "RXB" HX8 RX-19B	A2 Ø19	Ø5.5	110	28 - 68	#5	4.0 - 12.5	Ø10.0 HEX 8.0	100
13659	HWH RXB 5.5/6.3 X 150 #5 "RXB" HX8 RX-19B			150	48 - 108				
13660	HWH RXB 5.5/6.3 X 175 #5 "RXB" HX8 RX-19B			175	73 - 133				
13661	HWH RXB 5.5/6.3 X 200 #5 "RXB" HX8 RX-19B			200	98 - 158				
15320	HWH RXB 5.5/6.3 X 250 #5 "RXB" HX8 RX-19B			250	148 - 208				
13663	HWH RXB 5.5/6.3 X 300 #5 "RXB" HX8 RX-19B			300	198 - 258				



Download
Technical data sheet

APPLICATION

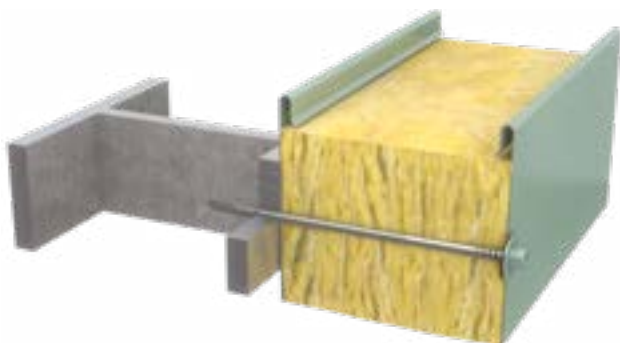

- The screw drill through the sandwich panel and then the steel substrate
- The high thread at the head locks the sheet to prevent deformation
- The cone below the head ensure maximum sealling between the screw head, washer and sandwich panel.
- Free-spin function of the thread just below the head avoiding the spinning thread from locking through the hole in the outer panel sheet, - and thereby maintaining the assembly and pressure between sheet and washer

BI-METAL SANDWICH PANEL SCREW

SELF DRILLING SCREW FOR FASTENING OF SANDWICH PANELS TO STEEL

NEW

- Drilling, tapping and fastening in one operation
- Stainless steel screw A2 with spiral drill point #2 in hardened steel
- High thread at the head with "free spin" for better grip in the sheet. Protects the sheet – no deformation
- Supplied with Ø19 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Available with stainless steel washer Ø22, Ø25 and Ø29 mm
- Good corrosion resistance
- Available in 500 colours (QUALICOAT certified powder)



HX

Corrosion category

Bi-metal stainless A2

PRODUCT RANGE

MG:06 PG:1031 HWH HELIX RXB D1/D2 X L #7 "RXB" HX8 RX-19B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Panel thickness [mm]	Drill cap. [mm]	Head [mm]	Unit [pcs]
20153	HWH HELIX RXB 5.5/6.3 X 160 #7 "RXB" HX8 RX-19B	A2 Ø19	Ø5.5	160	39 - 103	4.0 - 20.0	Ø12.5 HEX 8.0	100
20155	HWH HELIX RXB 5.5/6.3 X 220 #7 "RXB" HX8 RX-19B			220	99 - 163			
20157	HWH HELIX RXB 5.5/6.3 X 260 #7 "RXB" HX8 RX-19B			260	140 - 203			
20586	HWH HELIX RXB 6.3/7.0 X 310 #7 "RXB" HX8 RX-19B		Ø6.3	310	191 - 253			
20589	HWH HELIX RXB 6.3/7.0 X 360 #7 "RXB" HX8 RX-19B			360	241 - 303			



Download
Technical data sheet

APPLICATION



- The screw drill through the sandwich panel and then the steel substrate
- The high thread at the head locks the sheet to prevent deformation
- The cone below the head ensure maximum sealling between the screw head, washer and sandwich panel.
- Free-spin function of the thread just below the head avoiding the spinning thread from locking through the hole in the outer panel sheet, - and thereby maintaining the assembly and pressure between sheet and washer

WING DRILL SCREWS

» for fastening of wood to steel


	Page
STEEL SCREWS	
ROCO™ VBS CSH-TR 4.8 X L #3 TX20 W	69
ROCO™ VBS CSH-TR 5.5 X L #3 TX20 W	69
ROCO™ VBS CSH-TR 5.5 X L #5 TX20 W	70
ROCO™ VBS CSH-TR 6.3 X L #4 TX30 W	70
BI-METAL SCREWS	
ROCO™ VBS CSH-TR RX4B 4.8 X L #3 TX20 W	71
ROCO™ VBS CSH-TR RX4B 5.5 X L #3 TX20 W	71



ROCO™ WING DRILL SCREW

SELF DRILLING SCREW FOR FASTENING OF WOOD TO STEEL

- Drilling, tapping and fastening in one operation
- Drill point designed to drill in harder steel
- The wings make an enlarged hole in the wood and will break away when the screw penetrates the steel
- Countersunk head with ribs
- Surface treated with ZYTEC™ GX for optimal corrosion protection



PRODUCT RANGE

MG:06 PG:9170 **ROCO VBS CSH-TR 4.8 X L #3 TX20 W**



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Material thickness [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
18166	ROCO VBS CSH-TR 4.8 X 38 #3 TX20 W	Ø4.8	38	Max 17.0	#3	1.5 - 5.0	Ø8.9 TX20	250
18168	ROCO VBS CSH-TR 4.8 X 50 #3 TX20 W		50	Max 29.0				
18170	ROCO VBS CSH-TR 4.8 X 65 #3 TX20 W		65	Max 44.0				

MG:06 PG:9175 **ROCO VBS CSH-TR 5.5 X L #3 TX20 W**



Download
Technical data sheet




Art.no.	Item name	Thread [mm]	Length L [mm]	Material thickness [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
18173	ROCO VBS CSH-TR 5.5 X 50 #3 TX20 W	Ø5.5	50	Max 27.0	#3	1.5 - 6.0	Ø9.8 TX20	200
18175	ROCO VBS CSH-TR 5.5 X 65 #3 TX20 W		65	Max 42.0				250
18177	ROCO VBS CSH-TR 5.5 X 80 #3 TX20 W		80	Max 57.0				250
18179	ROCO VBS CSH-TR 5.5 X 109 #3 TX20 W		109	Max 86.0				200

ROCO™ WING DRILL SCREW

SELF DRILLING SCREW FOR FASTENING OF WOOD TO STEEL

- Drilling, tapping and fastening in one operation
- Drill point designed to drill in harder steel
- The wings make an enlarged hole in the wood and will break away when the screw penetrates the steel
- Countersunk head with ribs
- Surface treated with ZYTEC™ GX for optimal corrosion protection



PRODUCT RANGE

MG:06 PG:9180 **ROCO VBS CSH-TR 5.5 X L #5 TX20 W**



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Material thickness [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
18181	ROCO VBS CSH-TR 5.5 X 60 #5 TX20 W	Ø5.5	60	Max 22.0	#5	4.0 - 12.5	Ø9.8 TX20	100
18183	ROCO VBS CSH-TR 5.5 X 85 #5 TX20 W		85	Max 47.0				250
18185	ROCO VBS CSH-TH 5.5 X 109 #5 TX20 W		109	Max 71.0				100

MG:06 PG:9185 **ROCO VBS CSH-TR 6.3 X L #4 TX30 W**



Download
Technical data sheet




Art.no.	Item name	Thread [mm]	Length L [mm]	Material thickness [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
18187	ROCO VBS CSH-TR 6.3 X 70 #4 TX30 W	Ø6.3	70	Max 42.0	#4	3.5 - 8.0	12.4 TX30	250
18189	ROCO VBS CSH-TR 6.3 X 95 #4 TX30 W		95	Max 67.0				

ROCO™ BI-METAL WING DRILL SCREW

SELF DRILLING SCREW FOR FASTENING OF WOOD TO STEEL

- Drilling, tapping and fastening in one operation
- Drill point designed to drill in harder steel
- The wings make an enlarged hole in the wood and will break away when the screw penetrates the steel
- Countersunk head with ribs
- Surface treated with ZYTEC™ Colour for optimal corrosion protection



PRODUCT RANGE

MG:06 PG:9187 **ROCO VBS CSH-TR RX4B 4.8 X L #3 TX20 W**



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Material thickness [mm]	Drill point	Drill cap. [mm]	He'ad [mm]	Unit [pcs]
18267	ROCO VBS CSH-TR RX4B 4.8 X 50 #3 TX20 W	Ø4.8	50	Max 25.0	#3	1.5 - 4.0	Ø8.9 TX20	250

MG:06 PG:9189 **ROCO VBS CSH-TR RX4B 5.5 X L #3 TX20 W**



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Material thickness [mm]	Drill point	Drill cap. [mm]	He'ad [mm]	Unit [pcs]
18264	ROCO VBS CSH-TR RX4B 5.5 X 65 #3 TX20 W	Ø5.5	65	Max 36.0	#3	1.5 - 5.0	Ø9.8 TX20	250
18769	ROCO VBS CSH-TR RX4B 5.5 X 80 #3 TX20 W		80	Max 52.0				
18771	ROCO VBS CSH-TR RX4B 5.5 X 102 #3 TX20 W		102	28 - 74				
18773	ROCO VBS CSH-TR RX4B 5.5 X 127 #3 TX20 W		127	53 - 100				200

APPLICATION



SELF TAPPING FACADE SCREWS

» for fastening in wood and steel constructions

	Page
STEEL SCREWS	
HWH A 4.8 X L "A" HX8 ALU-14B	73
HWH A 6.5 X L "A" HX8 ALU-16B	74
HFH AB 6.3 X L "A" HX8	75
HFH BZ 6.3 X L "A" HX8	76
STAINLESS SCREWS	
HWH A RX 4.8 X L "RX" HX8 RX-14B	77
HWH A RX 6.5 X L "RX" HX8 RX-16B	78
HH A RX 6.5 X L HX3/8" RX-16B	79
HWH AB RX 6.3 X L "RX" HX8	80
HWH BZ RX 6.3 X L "RX" HX8 RX-16B	81
HH BZ RX 6.3 X L HX3/8" RX-16B	82
PLS CSH RX D X L TX	83
PLS PH RX D X L TX	84
PLS PH RX 4.8 X L TX20	85
PH CY RX 4.8 X L TX20 WSH-SQ RX-10B	86
PH-R RX 4.8 X L TX20	87



SELF TAPPING FACADE SCREW, A

SCREW FOR FASTENING OF STEEL CLADDING TO WOOD OR STEEL

- Tapping and fastening in one operation
- Up to 0.7 mm steel without predrilling
- Supplied with Ø14 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Surface treated with 20 µm zinc
- Also available without washer
- Available in 500 colours (QUALICOAT certified facade quality powder)



HX

Corrosion
categoryHardened
steel

PRODUCT RANGE




Download
Technical data sheet

MG:06 PG:2210 HWH A 4.8 X L "A" HX8 ALU-14B



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
12994	HWH A 4.8 X 25 "A" HX8 ALU-14B	ALU Ø14	Ø4.8	25	Ø10.0 HEX 8.0	250
13412	HWH A 4.8 X 38 "A" HX8 ALU-14B			38		


APPLICATION

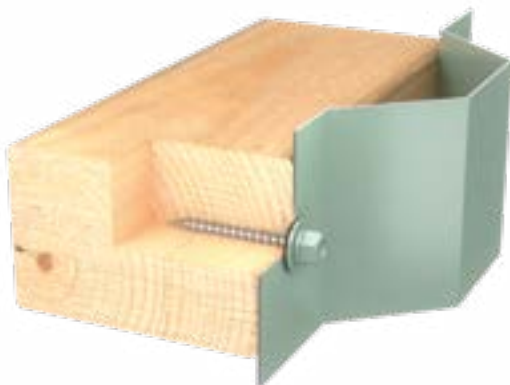

SELF TAPPING FACADE SCREW, A

SCREW FOR FASTENING OF STEEL CLADDING TO WOOD OR STEEL

- Tapping and fastening in one operation
- Supplied with Ø16 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Surface treated with ZYTEC™+
- Also available without washer
- See chart of predrilling in different steel thicknesses
- Available in 500 colours (QUALICOAT certified powder)
- CE-marked according to EN 14592 for applications where thin gauge sheeting is fastened to wood substrate



PRODUCT RANGE

MG:06 PG:4250 HWH A 6.5 X L "A" HX8 ALU-16B




Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Steel thickness [mm]	Head [mm]	Unit [pcs]
13040	HWH A 6.5 X 38 "A" HX8 ALU-16B	ALU Ø16	Ø6.5	38	Max 3.0	Ø10.6 HEX 8.0	250
13042	HWH A 6.5 X 51 "A" HX8 ALU-16B			51			
13044	HWH A 6.5 X 76 "A" HX8 ALU-16B			76			

Steel thickness	Drill diameter
< 0.63	Ø4.0 mm
0.63 - 2.0 mm	Ø4.2 mm
2.0 - 3.0 mm	Ø5.0 mm

APPLICATION

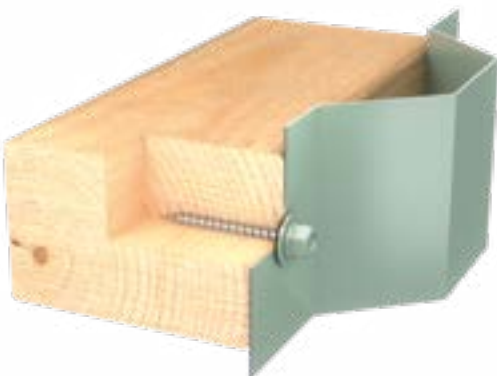

SELF TAPPING FACADE SCREW, AB

SCREW FOR FASTENING OF STEEL CLADDING TO STEEL

- Tapping and fastening in one operation
- Large flange under the head for better load distribution
- Available with Ø16 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Surface treated with 20 µm zinc
- See chart of predrilling in different steel thicknesses
- Available in 500 colours (QUALICOAT certified quality powder)



HX

Corrosion
categoryHardened
steel

PRODUCT RANGE

MG:06 PG:8000 HFH AB 6.3 X L "A" HX8

Download
Technical data sheet

Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Steel thickness [mm]	Head [mm]	Unit [pcs]
13057	HFH AB 6.3 X 19 "A" HX8	-	Ø6.3	19	2.0 - 5.0	Ø14.0 HEX 8.0	250
13058	HFH AB 6.3 X 19 "A" HX8 ALU-16B	ALU Ø16					

Steel thickness	Drill diameter
2.0 - 4.0 mm	Ø5.3 mm
4.0 - 5.0 mm	Ø5.5 mm

APPLICATION



SELF TAPPING FACADE SCREW, BZ

SCREW FOR FASTENING OF STEEL CLADDING TO STEEL

- Tapping and fastening in one operation
- Large flange under the head for better load distribution
- Available with Ø16 mm alu washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Surface treated with 20 µm zinc
- See chart of predrilling in different steel thicknesses
- Available in 500 colours (QUALICOAT certified quality powder)



HX

Corrosion
categoryHardened
steel

PRODUCT RANGE


MG:06 PG:7990 HFH BZ 6.3 X L "A" HX8

Download
Technical data sheet

Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Steel thickness [mm]	Head [mm]	Unit [pcs]
13053	HFH BZ 6.3 X 19 "A" HX8	-	Ø6.3	19	min. 2.0	Ø14.0 HEX 8.0	250
13054	HFH BZ 6.3 X 19 "A" HX8 ALU-16B	ALU Ø16					
13055	HFH BZ 6.3 X 25 "A" HX8	-		25			
13056	HFH BZ 6.3 X 25 "A" HX8 ALU-16B	ALU Ø16					

Steel thickness	Drill diameter
2.0 - 4.0 mm	Ø5.3 mm
4.0 - 5.0 mm	Ø5.5 mm
5.0 - 6.0 mm	Ø5.7 mm
> 6.0 mm	Ø5.8 mm


APPLICATION

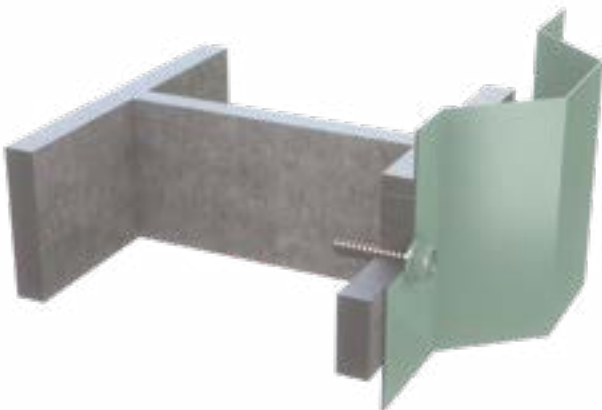

STAINLESS SELF TAPPING FACADE SCREW, A

SCREW FOR FASTENING OF STEEL CLADDING TO WOOD

- Tapping and fastening in one operation
- Up to 0.7 mm steel without predrilling
- Stainless steel screw A2
- Supplied with Ø14 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Also available without washer
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:7120 HWH A RX 4.8 X L "RX" HX8 RX-14B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
11815	HWH A RX 4.8 X 25 "RX" HX8 RX-14B	A2 Ø14	Ø4.8	25	Ø10.0 HEX 8.0	250
13037	HWH A RX 4.8 X 32 "RX" HX8 RX-14B			32		
12093	HWH A RX 4.8 X 38 "RX" HX8 RX-14B			38		
13039	HWH A RX 4.8 X 50 "RX" HX8 RX-14B			50		

APPLICATION



STAINLESS SELF TAPPING FACADE SCREW, A

SCREW FOR FASTENING OF STEEL CLADDING TO WOOD OR STEEL

- Tapping and fastening in one operation
- Stainless steel screw A2
- Supplied with Ø16 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- See chart of predrilling in different steel thicknesses
- Available in 500 colours (QUALICOAT certified powder)



HX

Corrosion
categoryStainless
steel A2

PRODUCT RANGE

MG:06 PG:4230 HWH A RX 6.5 X L "RX" HX8 RX-16B

Download
Technical data sheet

Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Steel thickness [mm]	Head [mm]	Unit [pcs]
10772	HWH A RX 6.5 X 19 "RX" HX8 RX-16B	A2 Ø16	Ø6.5	19	max. 3.0	Ø10.0 HEX 8.0	250
10778	HWH A RX 6.5 X 25 "RX" HX8 RX-16B			25			
10779	HWH A RX 6.5 X 32 "RX" HX8 RX-16B			32			
10780	HWH A RX 6.5 X 38 "RX" HX8 RX-16B			38			
10781	HWH A RX 6.5 X 45 "RX" HX8 RX-16B			45			
10782	HWH A RX 6.5 X 50 "RX" HX8 RX-16B			50			100
10783	HWH A RX 6.5 X 55 "RX" HX8 RX-16B			55			
15486	HWH A RX 6.5 X 60 "RX" HX8 RX-16B			60			
10784	HWH A RX 6.5 X 65 "RX" HX8 RX-16B			65			
15487	HWH A RX 6.5 X 70 "RX" HX8 RX-16B			70			
15686	HWH A RX 6.5 X 75 "RX" HX8 RX-16B			75			

Steel thickness	Drill diameter
< 0.63	Ø4.0 mm
0.63 - 2.0 mm	Ø4.2 mm
2.0 - 3.0 mm	Ø5.0 mm

APPLICATION



STAINLESS SELF TAPPING FACADE SCREW, A

SCREW FOR FASTENING OF SANDWICH PANELS TO WOOD OR STEEL

- Tapping and fastening in one operation
- Stainless steel screw A2
- Supplied with Ø16 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Also available without washer
- See chart of predrilling in different steel thicknesses
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE



Download
Technical data sheet




MG:06 PG:4240 HH A RX 6.5 X L HX3/8" RX-16G

Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Steel thickness [mm]	Head [mm]	Unit [pcs]
14419	HH A RX 6.5 X 60 HX3/8" RX-16G	A2 Ø16	Ø6.5	60	max. 3.0	HEX 3/8"	250
13772	HH A RX 6.5 X 70 HX3/8" RX-16G			70			
10785	HH A RX 6.5 X 75 HX3/8" RX-16G			75			
10786	HH A RX 6.5 X 90 HX3/8" RX-16G			90			
10787	HH A RX 6.5 X 100 HX3/8" RX-16G			100			100
10788	HH A RX 6.5 X 115 HX3/8" RX-16G			115			
10789	HH A RX 6.5 X 130 HX3/8" RX-16G			130			
10790	HH A RX 6.5 X 150 HX3/8" RX-16G			150			
10791	HH A RX 6.5 X 175 HX3/8" RX-16G			175			
10792	HH A RX 6.5 X 200 HX3/8" RX-16G			200			
10793	HH A RX 6.5 X 220 HX3/8" RX-16G			220			
10794	HH A RX 6.5 X 240 HX3/8" RX-16G			240			
10795	HH A RX 6.5 X 260 HX3/8" RX-16G			260			

Steel thickness	Drill diameter
< 0.63	Ø4.0 mm
0.63 - 2.0 mm	Ø4.2 mm
2.0 - 3.0 mm	Ø5.0 mm

APPLICATION

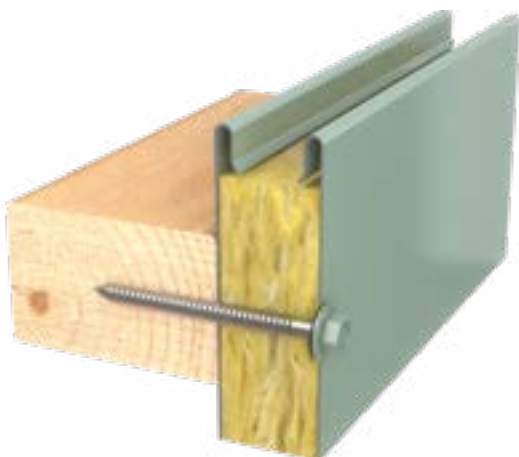

STAINLESS SELF TAPPING FACADE SCREW, AB

SCREW FOR FASTENING OF STEEL CLADDING TO STEEL

- Tapping and fastening in one operation
- Stainless steel screw A2
- Available with Ø16 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- See chart of predrilling in different steel thicknesses
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:8010 HWH AB RX 6.3 X L "RX" HX8 RX-16B




Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Steel thickness [mm]	Head [mm]	Unit [pcs]
13059	HWH AB RX 6.3 X 19 "RX" HX8	-	Ø6.3	19	0.9 - 5.0	Ø10.0 HEX 8.0	250
13060	HWH AB RX 6.3 X 19 "RX" HX8 RX-16B	A2 Ø16		25			
13061	HWH AB RX 6.3 X 25 "RX" HX8	-		38			
13062	HWH AB RX 6.3 X 25 "RX" HX8 RX-16B	A2 Ø16		51			
18970	HWH AB RX 6.3 X 38 "RX" HX8	-					100
18969	HWH AB RX 6.3 X 38 "RX" HX8 RX-16B	A2 Ø16					
18972	HWH AB RX 6.3 X 51 "RX" HX8	-					
18971	HWH AB RX 6.3 X 51 "RX" HX8 RX-16B	A2 Ø16					

Steel thickness	Drill diameter
2.0 - 4.0 mm	Ø5.3 mm
4.0 - 5.0 mm	Ø5.5 mm

APPLICATION

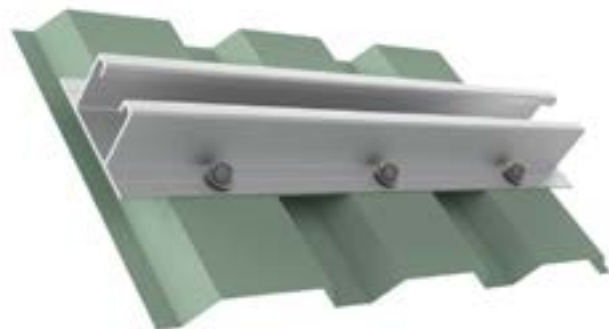

STAINLESS SELF TAPPING FACADE SCREW, BZ

SCREW FOR FASTENING OF WALL CLADDING TO STEEL

- Tapping and fastening in one operation
- Stainless steel screw A2
- Supplied with Ø16 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Also available without washer
- See chart of predrilling in different steel thicknesses
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:4200 HWH BZ RX 6.3 X L "RX" HX8 RX-16B




Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Steel thickness [mm]	Head [mm]	Unit [pcs]
10693	HWH BZ RX 6.3 X 19 "RX" HX8 RX-16B	A2 Ø16	Ø6.3	19	min. 2.0	Ø10.0 HEX 8.0	500
10690	HWH BZ RX 6.3 X 25 "RX" HX8 RX-16B			25			
10691	HWH BZ RX 6.3 X 32 "RX" HX8 RX-16B			32			
12533	HWH BZ RX 6.3 X 38 "RX" HX8 RX-16B			38			
10692	HWH BZ RX 6.3 X 51 "RX" HX8 RX-16B			51			
10696	HWH BZ RX 6.3 X 64 "RX" HX8 RX-16B			64			

Steel thickness	Drill diameter
2.0 - 4.0 mm	Ø5.3 mm
4.0 - 5.0 mm	Ø5.5 mm
5.0 - 6.0 mm	Ø5.7 mm
> 6.0 mm	Ø5.8 mm

APPLICATION

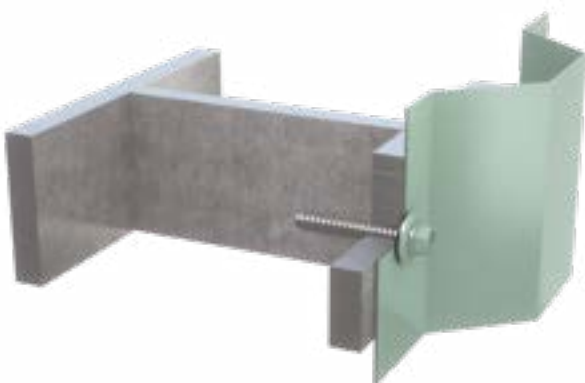

STAINLESS SELF TAPPING FACADE SCREW, BZ

SCREW FOR FASTENING OF WALL CLADDING TO STEEL

- Tapping and fastening in one operation
- Stainless steel screw A2
- Supplied with Ø16 mm stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Also available without washer
- See chart of predrilling in different steel thicknesses
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:4210 HH BZ RX 6.3 X L HX3/8" RX-16B




Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Steel thickness [mm]	Head [mm]	Unit [pcs]
10706	HH BZ RX 6.3 X 90 HX3/8" RX-16B	A2 Ø16	Ø6.3	90	min. 2.0	HEX 3/8"	100
10700	HH BZ RX 6.3 X 100 HX3/8" RX-16B			100			
10697	HH BZ RX 6.3 X 115 HX3/8" RX-16B			115			
10703	HH BZ RX 6.3 X 130 HX3/8" RX-16B			130			
10702	HH BZ RX 6.3 X 150 HX3/8" RX-16B			150			
10708	HH BZ RX 6.3 X 175 HX3/8" RX-16B			175			
10705	HH BZ RX 6.3 X 200 HX3/8" RX-16B			200			
10704	HH BZ RX 6.3 X 220 HX3/8" RX-16B			220			
10701	HH BZ RX 6.3 X 240 HX3/8" RX-16B			240			
10707	HH BZ RX 6.3 X 260 HX3/8" RX-16B			260			

Steel thickness	Drill diameter
2.0 - 4.0 mm	Ø5.3 mm
4.0 - 5.0 mm	Ø5.5 mm
5.0 - 6.0 mm	Ø5.7 mm
> 6.0 mm	Ø5.8 mm

APPLICATION

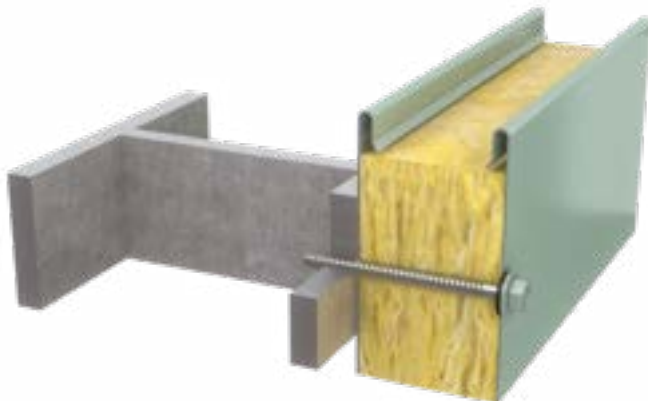

STAINLESS SELF TAPPING SCREW

SCREW FOR FASTENING IN ALUMINUM PROFILES

- Screw with countersunk head and TX recess
- Stainless steel screw A2
- Also available in stainless steel quality A4



PRODUCT RANGE

MG:06 PG:7090 PLS CSH RX D X L TX



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
17374	PLS CSH RX 3.5 X 9.5 TX10	Ø3.5	9.5	Ø7.3 TX10	1000
11581	PLS CSH RX 3.9 X 13 TX15	Ø3.9	13	Ø7.8 TX15	1000
11583	PLS CSH RX 3.9 X 16 TX15		16		
11585	PLS CSH RX 3.9 X 19 TX15		19		
11586	PLS CSH RX 3.9 X 22 TX15		22		
11588	PLS CSH RX 3.9 X 38 TX15		38		
16360	PLS CSH RX 3.9 X 45 TX15		45		500
11590	PLS CSH RX 4.2 X 16 TX20	Ø4.2	16	Ø8.4 TX20	1000
11593	PLS CSH RX 4.2 X 19 TX20		19		
11596	PLS CSH RX 4.2 X 25 TX20		25		
11597	PLS CSH RX 4.2 X 32 TX20		32		
11599	PLS CSH RX 4.2 X 38 TX20		38		500
11600	PLS CSH RX 4.8 X 19 TX25	Ø4.8	19	Ø9.3 TX25	1000
11602	PLS CSH RX 4.8 X 25 TX25		25		500
11604	PLS CSH RX 4.8 X 32 TX25		32		
11606	PLS CSH RX 4.8 X 38 TX25		38		
16608	PLS CSH RX 4.8 X 50 TX25		50		
17486	PLS CSH RX 4.8 X 60 TX25		60		400

APPLICATION



STAINLESS SELF TAPPING SCREW

SCREW FOR FASTENING IN ALUMINUM PROFILES

- Screw with Pan head and TX recess
- Available with stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Stainless steel screw A2
- Also available in stainless steel quality A4



TX

Corrosion
categoryStainless
steel A2

PRODUCT RANGE

MG:06 PG:7040 PLS PH RX D X L TX

Download
Technical data sheet

Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
11559	PLS PH RX 2.9 X 19 TX8	Ø2.9	19	Ø5.6 TX8	1000
16129	PLS PH RX 3.5 X 13 TX15	Ø3.5	13	Ø7.0 TX15	1000
15822	PLS PH RX 3.9 X 9.5 TX15	Ø3.9	9.5	Ø7.5 TX15	1000
11560	PLS PH RX 3.9 X 13 TX15		13		
16508	PLS PH RX 4.2 X 9.5 TX20	Ø4.2	9.5	Ø8.0 TX20	1000
13911	PLS PH RX 4.2 X 13 TX20		13		
11675	PLS PH RX 4.2 X 25 TX20		25		
13910	PLS PH RX 4.8 X 13 TX25	Ø4.8	13	Ø9.5 TX25	1000
11561	PLS PH RX 4.8 X 16 TX25		16		
11562	PLS PH RX 4.8 X 19 TX25		19		
11563	PLS PH RX 4.8 X 25 TX25		25		
11564	PLS PH RX 4.8 X 32 TX25		32		250
11565	PLS PH RX 4.8 X 38 TX25		38		
13679	PLS PH RX 4.8 X 50 TX25		50		200
13675	PLS PH RX 4.8 X 60 TX25		60		
11567	PLS PH RX 5.5 X 19 TX25	Ø5.5	19	Ø11.0 TX25	1000
11568	PLS PH RX 5.5 X 25 TX25		25		500
11569	PLS PH RX 5.5 X 32 TX25		32		
11570	PLS PH RX 5.5 X 38 TX25		38		250
11571	PLS PH RX 5.5 X 45 TX25		45		
11572	PLS PH RX 5.5 X 50 TX25		50		200
11573	PLS PH RX 5.5 X 60 TX25		60		
11575	PLS PH RX 6.3 X 45 TX30	Ø6.3	45	Ø12.0 TX30	200
11576	PLS PH RX 6.3 X 60 TX30		60		


APPLICATION



STAINLESS SELF TAPPING SCREW

SCREW FOR FASTENING IN ALUMINUM PROFILES

- Screw with Pan head and TX recess
- Available with stainless washer vulcanized with EPDM for better load distribution and increased sealing abilities
- Stainless steel screw A2



PRODUCT RANGE

MG:06 PG:7040 PLS PH RX 4.8 X L TX20



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
19952	PLS PH RX 4.8 X 13 TX20	Ø4.8	13	Ø9.3 TX20	1000
19956	PLS PH RX 4.8 X 16 TX20		16		
19960	PLS PH RX 4.8 X 19 TX20		19		
19964	PLS PH RX 4.8 X 22 TX20		22		
19968	PLS PH RX 4.8 X 25 TX20		25		500
19972	PLS PH RX 4.8 X 32 TX20		32		
19976	PLS PH RX 4.8 X 38 TX20		38		
19980	PLS PH RX 4.8 X 50 TX20		50		200
19987	PLS PH RX 4.8 X 60 TX20		60		

APPLICATION



STAINLESS SELF TAPPING SCREW

SCREW FOR FASTENING IN ALUMINUM PROFILES

- Tapping and fastening in one operation
- Square washer with EPDM for better sealing



PRODUCT RANGE

MG:06 PG:3308 FH CY RX 4.8 X L TX20 WSH-SQ RX-10B



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
18365	FH CY RX 4.8 X 14 TX20	Ø4.8	14	Ø7.4 TX20	500
18367	FH CY RX 4.8 X 14 TX20 WSH-SQ RX-10B				

STAINLESS SELF TAPPING SCREW

SCREW FOR FASTENING IN ALUMINUM PROFILES

- Tapping and fastening in one operation
- Head with ribs that locks the screw in the sheet



PRODUCT RANGE

MG:06 PG:9195 PH-R RX 4.8 X L TX20



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
18348	PH-R RX 4.8 X 13 TX20	Ø4.8	13	Ø9.4 TX20	1000

CHIPBOARD SCREWS AND SCREWS FOR WOOD

» for fastening in wood

	Page
SPS CSH-R 4.0 X L/L1 TX20 TC	90
SPS CSH-R 5.0 X L/L1 TX20 TC	91
SPS CSH-R 6.0 X L/L1 TX30 TC	91
HFH 6.0 X L/L1 HX8 TC	92
SPS CSH RX D X L/L1 TX	93
SPS CSH-R RX4 4.2 X L/L1 TX20 TC COL	95
SPS CSH-R RX4 4.2 X L/L1 PH2 TC COL	95
SPS PH RX D X L TX	96
BES MH 4.9 X L TX20 TC	97
BES MH RX 4.9 X L TX20 TC	97
BES MH RX4 4.9 X L TX20 TC	97
BSS RX 4.5 X L TX20	98
TRABO FH 4.65 X L #1S TX20	99
TBS MH 4.5 X L TX25	100



CHIPBOARD SCREWS AND SCREWS FOR WOOD

» for fastening in wood

	Page
ETX MH RX 4.8 X L TX20	101
ETX MH RX4 4.8 X L TX20	101
ETX MH RXX 4.8 X L "RXX" TX20	102
ETX MH RX 5.0 X L #2 TX20 W	103
ETX MH RXB 4.8 X L #1S TX20 PT	104
FH RX 4.8 X L TX20	105
FH RX 4.8 X L TX20 TC	105
TRS PH 4.8 X L TX20 TC	106
CSH 4.8 X L #1 PH2	106
PH RX 4.8 X L TX20 TC	107
PH 4.2 X L SQ2	108
PH RX 3.5 X L SQ1 TC	109
PH RX4 3.5 X L SQ1 TC	109
PH RXB 3.5 X L #1 SQ	110



CHIPBOARD SCREW

SCREW FOR FASTENING OF WOOD

- Screw with countersunk head and TX recess
- Point with special thread cut for better threading in hard wood
- Slightly raised countersunk head with ribs (CSH-R)
- Surface treated with ZYTEC™+ for good corrosion protection



PRODUCT RANGE

MG:06 PG:6086 SPS CSH-R 4.0 X L/L1 TX20 TC



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Head [mm]	Unit [pcs]
14944	SPS CSH-R 4.0 X 20 TX20 TC	Ø4.0	20	-	Ø7.4 TX20	1000
14945	SPS CSH-R 4.0 X 25 TX20 TC		25	-		
14946	SPS CSH-R 4.0 X 28 TX20 TC		28	-		
14947	SPS CSH-R 4.0 X 30 TX20 TC		30	-		
14948	SPS CSH-R 4.0 X 35 TX20 TC		35	-		
15383	SPS CSH-R 4.0 X 40 TX20 TC		40	-		500
17120	SPS CSH-R 4.0 X 40/24 TX20 TC		40	16		
15119	SPS CSH-R 4.0 X 50/30 TX20 TC		50	20		250
15120	SPS CSH-R 4.0 X 60/36 TX20 TC		60	24		
15121	SPS CSH-R 4.0 X 70/42 TX20 TC		70	28		
18666	SPS CSH-R 4.0 X 80/48 TX20 TC		80	32		
15122	SPS CSH-R 4.0 X 90/54 TX20 TC		90	54		

APPLICATION



CHIPBOARD SCREW

SCREW FOR FASTENING OF WOOD

- Screw with countersunk head and TX recess
- Point with special thread cut for better threading in hard wood
- Slightly raised countersunk head with ribs (CSH-R)
- Surface treated with ZYTEC™+ for good corrosion protection



PRODUCT RANGE

MG:06 PG:6078 SPS CSH-R 5.0 X L/L1 TX20 TC



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Head [mm]	Unit [pcs]
14951	SPS CSH-R 5.0 X 20 TX20 TC	Ø5.0	20	-	Ø9.4 TX20	1000
14952	SPS CSH-R 5.0 X 25 TX20 TC		25	-		500
14953	SPS CSH-R 5.0 X 28 TX20 TC		28	-		
18921	SPS CSH-R 5.0 X 30 TX20 TC		30	-		
17000	SPS CSH-R 5.0 X 35 TX20 TC		35	-		250
14954	SPS CSH-R 5.0 X 40 TX20 TC		40	-		
18727	SPS CSH-R 5.0 X 45 TX20 TC		45	-		
14933	SPS CSH-R 5.0 X 50/30 TX20 TC		50	20		
18448	SPS CSH-R 5.0 X 60 TX20 TC		60	-		200
14934	SPS CSH-R 5.0 X 60/36 TX20 TC		60	24		
14935	SPS CSH-R 5.0 X 70/42 TX20 TC		70	28		150
14936	SPS CSH-R 5.0 X 80/48 TX20 TC		80	32		250
14937	SPS CSH-R 5.0 X 90/54 TX20 TC		90	36		
14669	SPS CSH-R 5.0 X 100/60 TX20 TC		100	40		200
14825	SPS CSH-R 5.0 X 110/60 TX20 TC		110	50		
14938	SPS CSH-R 5.0 X 120/68 TX20 TC		120	52		150

MG:06 PG:6065 SPS CSH-R 6.0 X L/L1 TX30 TC



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Head [mm]	Unit [pcs]
13835	SPS CSH-R 6.0 X 90/54 TX30 TC	Ø6.0	90	36	Ø11.4 TX30	250
13836	SPS CSH-R 6.0 X 120/72 TX30 TC		120	48		


APPLICATION



CHIPBOARD SCREW

SCREW FOR FASTENING OF WOOD

- Screw with HEX Flange Head
- Point with special thread cut for better threading in hard wood
- Large flange under the head for better load distribution
- Surface treated with ZYTEC™+ for good corrosion protection



PRODUCT RANGE

MG:06 PG:2870 HFH 6.0 X L/L1 HX8 TC



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Head [mm]	Unit [pcs]
15611	HFH 6.0 X 40/25 HX8 TC	Ø6.0	40	15	Ø15.0 HEX 8.0	100
15613	HFH 6.0 X 50/30 HX8 TC		50	20		
15615	HFH 6.0 X 60/36 HX8 TC		60	24		



STAINLESS CHIPBOARD SCREW

SCREW FOR FASTENING OF WOOD

- Screw with countersunk head and TX recess
- Stainless steel screw A2
- Also available in stainless steel quality A4



PRODUCT RANGE

MG:06 PG:6050 SPS CSH RX D X L/L1 TX



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Head [mm]	Unit [pcs]
11459	SPS CSH RX 3.0 X 20 TX10	Ø3.0	20	-	Ø6.0 TX10	1000
16206	SPS CSH RX 3.0 X 25 TX10		25	-		
11460	SPS CSH RX 3.0 X 30 TX10		30	-		500
16530	SPS CSH RX 3.0 X 35 TX10		35	-		1000
11465	SPS CSH RX 4.0 X 16 TX20	Ø4.0	16	-	Ø8.0 TX20	1000
14211	SPS CSH RX 4.0 X 20 TX20		20	-		
12615	SPS CSH RX 4.0 X 25 TX20		25	-		
13323	SPS CSH RX 4.0 X 30 TX20		30	-		
11466	SPS CSH RX 4.0 X 35 TX20		35	-		500
11484	SPS CSH RX 4.0 X 50/30 TX20		50	20		200
11472	SPS CSH RX 4.5 X 25 TX20	Ø4.5	25	-	Ø9.0 TX20	500
15824	SPS CSH RX 4.5 X 35 TX20		35	-		250
18615	SPS CSH RX 4.5 X 45 TX20		45	-		
18457	SPS CSH RX 4.5 X 50 TX20		50	-		200
11475	SPS CSH RX 4.5 X 50/30 TX20		50	20		
18562	SPS CSH RX 4.5 X 70/42 TX20		50	28		100

Continued on the next page...

APPLICATION



STAINLESS CHIPBOARD SCREW

SCREW FOR FASTENING OF WOOD

- Continued

Product range



MG:06 PG:6050 SPS CSH RX D X L/L1 TX



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Head [mm]	Unit [pcs]
15264	SPS CSH RX 5.0 X 20 TX25	Ø5.0	20	-	Ø10.0 TX25	500
11478	SPS CSH RX 5.0 X 25 TX25		25	-		
11480	SPS CSH RX 5.0 X 30 TX25		30	-		
11481	SPS CSH RX 5.0 X 40 TX25		40	-		
11489	SPS CSH RX 5.0 X 50 TX25		50	-		
13184	SPS CSH RX 5.0 X 50/30 TX25		50	20		200
16467	SPS CSH RX 5.0 X 55/35 TX25		55	20		
18678	SPS CSH RX 5.0 X 60 TX25		60	-		
11491	SPS CSH RX 5.0 X 60/36 TX25		60	24		
11503	SPS CSH RX 5.0 X 70/42 TX25		70	28		
15274	SPS CSH RX 5.0 X 80 TX25		80	-		
11499	SPS CSH RX 5.0 X 80/48 TX25		80	32		
11500	SPS CSH RX 5.0 X 90/54 TX25		90	36		
11507	SPS CSH RX 5.0 X 100/60 TX25		100	40		100
16480	SPS CSH RX 6.0 X 40 TX25	Ø6.0	40	-	Ø12.0 TX25	100
11511	SPS CSH RX 6.0 X 60/36 TX25		60	24		
11501	SPS CSH RX 6.0 X 90/54 TX25		90	36		
11509	SPS CSH RX 6.0 X 100/70 TX25		100	30		
14833	SPS CSH RX 6.0 X 120/70 TX25		120	50		
11502	SPS CSH RX 8.0 X 120/80 TX40	Ø8.0	120	40	Ø15.0 TX40	100

APPLICATION



STAINLESS CHIPBOARD SCREW

SCREW FOR FASTENING OF WOOD

- Designed for fastening of outdoor flooring
- With countersunk head and ribs
- Screws can also be delivered collated (COL)



PRODUCT RANGE

MG:06 PG:5068 SPS CSH-R RX4 4.2 X L/L1 TX20 TC COL



Art.no.	Item name	Thread [mm]	Length L [mm]	Shaft [mm]	Head [mm]	Unit [pcs]
16960	SPS CSH-R RX4 4.2 X 55/30 TX20 TC	Ø4.2	55	25	Ø7.5 TX20	500

MG:06 PG:5062 SPS CSH-R RX4 4.2 X L/L1 PH2 TC COL



Art.no.	Item name	Thread [mm]	Length L [mm]	Shaft [mm]	Head [mm]	Unit [pcs]
16034	SPS CSH-R RX4 4.2 X 55/30 PH2 TC COL	Ø4.2	55	25	Ø7.5 PH2	1000

APPLICATION



STAINLESS CHIPBOARD SCREW

SCREW FOR FASTENING OF WOOD

- Screw with Pan head and TX recess
- Stainless steel screw A2
- Also available in stainless steel quality A4



PRODUCT RANGE

MG:06 PG:6010 SPS PH RX D X L TX



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
*17738	SPS PH RX 3.0 X 16 TX10	Ø3.0	16	Ø6.0 TX10	200
*12941	SPS PH RX 3.0 X 25 TX10		25		
15871	SPS PH RX 4.0 X 30 TX20	Ø4.0	30	Ø8.0 TX20	200
11483	SPS PH RX 4.5 X 16 TX20	Ø4.5	16	Ø9.0 TX20	1000
11486	SPS PH RX 4.5 X 25 TX20		25		500
11495	SPS PH RX 5.0 X 20 TX25	Ø5.0	20	Ø10.0 TX25	500
11497	SPS PH RX 5.0 X 25 TX25		25		
15872	SPS PH RX 5.0 X 30 TX25		30		
11498	SPS PH RX 5.0 X 40 TX25		40		
11494	SPS PH RX 5.0 X 50 TX25		50		200
11488	SPS PH RX 5.0 X 60 TX25		60		
15715	SPS PH RX 5.0 X 70 TX25		70		
12598	SPS PH RX 5.0 X 80 TX25		80		
11504	SPS PH RX 6.0 X 60 TX25	Ø6.0	60	Ø12.0 TX25	200
13159	SPS PH RX 6.0 X 90 TX25		90		100
16883	SPS PH RX 6.0 X 120/70 TX25		120		

* Not CE-marked

APPLICATION



BRACKET SCREW

SCREW FOR FASTENING OF BRACKET TO WOOD

- Screw with Mushroom head and TX recess
- Point with special thread cut for better threading in hardwood
- Hardened steel screw is surface treated with 12 µm zinc



PRODUCT RANGE

MG:06 PG:6096 **BES MH 4.9 X L TX20 TC**



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
13670	BES MH 4.9 X 35 TX20 TC	Ø4.9	35	Ø8.5 TX20	250
13671	BES MH 4.9 X 40 TX20 TC		40		
13672	BES MH 4.9 X 50 TX20 TC		50		

MG:06 PG:6097 **BES MH RX 4.9 X L TX20 TC**



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
15787	BES MH RX 4.9 X 40 TX20 TC	Ø4.9	40	Ø8.5 TX20	250

MG:06 PG:6098 **BES MH RX4 4.9 X L TX20 TC**



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
15788	BES MH RX4 4.9 X 40 TX20 TC	Ø4.9	40	Ø8.5 TX20	250

APPLICATION



SPENGLER SCREW

SCREW FOR FASTENING OF COPPER- AND ZINK FLASHINGS TO WOOD

- Screw with raised countersunk head (Lens-shaped) and TX20 recess
- The stainless washer ensures a stable connection with better load distribution, increased sealing abilities and a fine finish
- Stainless steel screw A2
- The washers is available in 4 different A2 variants
 - Ø15 or Ø20 mm with vulcanized with EPDM rubber
 - Ø15 or Ø20 mm with separate EPDM rubber



PRODUCT RANGE

MG:06 PG:3660 BSS RX 4.5 X L TX20




Art.no.	Item name	Configuration	Washer [mm]	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
10859-00	BSS RX 4.5 X 25 TX20 2D-15G	A2	A2 Ø15	Ø4.5	25	Ø8.2 TX20	100
10859-01		A2 with copper coating					
10863-00	BSS RX 4.5 X 35 TX20 2D-15G	A2			35		
10863-01		A2 with copper coating					
10867-00	BSS RX 4.5 X 45 TX20 2D-15G	A2			45		
10867-01		A2 with copper coating					
10871-00	BSS RX 4.5 X 55 TX20 2D-15G	A2			55		
10871-01		A2 with copper coating					
10875-00	BSS RX 4.5 X 60 TX20 2D-15G	A2			60		
10875-01		A2 with copper coating					
10877-00	BSS RX 4.5 X 65 TX20 2D-15G	A2			65		
10877-01		A2 with copper coating					
10881-00	BSS RX 4.5 X 80 TX20 2D-15G	A2			80		
10885-00	BSS RX 4.5 X 100 TX20 2D-15G	A2			100		
10885-01		A2 with copper coating					
10889-00	BSS RX 4.5 X 120 TX20 2D-15G	A2			120		

ACOUSTIC PANEL SCREW

SCREW FOR FASTENING OF PANELS TO WOOD OR STEEL

- Flat head with TX20 recess
- Large head for better load distribution
- Special designed pattern on the head for better concealing
- Surface treated with ZYTEC™ GX for optimal corrosion protection
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:9055 TRABO FH 4.65 X L #1S TX20



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Shaft [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
17770	TRABO FH 4.65 X 45 #1S TX20	Ø4.65	45	34.5	12.0	#1S	0.5 - 1.5	Ø13.5 TX20	250
18090	TRABO FH 4.65 X 64 #1S TX20		64	53.0					100
19939	TRABO FH 4.65 X 80 #1S TX20		80	71.0					

APPLICATION



ACOUSTIC PANEL SCREW

SCREW FOR FASTENING OF PANELS TO WOOD

- Large head for better load distribution
- Mushroom head for an aesthetic finish
- Surface treated with ZYTEC™ M for optimal corrosion protection
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:3210 TBS MH 4.5 X L TX25



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Shaft [mm]	Head [mm]	Unit [pcs]
10731	TBS MH 4.5 X 45 TX25	Ø4.5	45	12.5	Ø12.5 TX25	250
17141	TBS MH 4.5 X 80 TX25		80			100

APPLICATION



STAINLESS FACADE SCREW

SCREW FOR FASTENING OF CLADDINGS TO WOOD

- Large head for better load distribution
- Screw with s-point. Predrilling is necessary (oversize hole)
- Stainless steel screw A2/A4
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:2600 ETX MH RX 4.8 X L TX20




Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Head [mm]	Unit [pcs]
10441	ETX MH RX 4.8 X 25 TX20	Ø4.8	25	6	Ø12.1 TX20	250
17403	ETX MH RX 4.8 X 29 TX20		29			
10442	ETX MH RX 4.8 X 33 TX20		33	8		
10443	ETX MH RX 4.8 X 39 TX20		39			
10444	ETX MH RX 4.8 X 60 TX20		60	12		100

MG:06 PG:4590 ETX MH RX4 4.8 X L TX20



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Head [mm]	Unit [pcs]
17404	ETX MH RX4 4.8 X 29 TX20	Ø4.8	29	6	Ø12.1 TX20	250
10906	ETX MH RX4 4.8 X 40 TX20		40	8		
16296	ETX MH RX4 4.8 X 60 TX20		60	12		100

APPLICATION

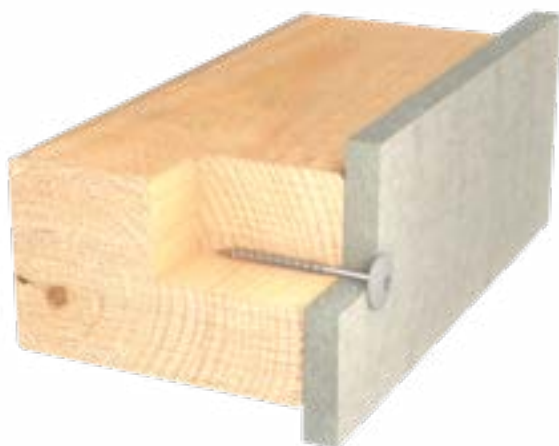

STAINLESS FACADE SCREW

SCREW FOR FASTENING OF CLADDINGS IN CHLORINE-CONTAINING ENVIRONMENTS

- Large head for better load distribution
- Screw with s-point. Predrilling can be necessary
- Stainless steel screw (w. 1.4529)
- Available in 500 colours (QUALICOAT certified facade quality powder)



TX

Corrosion
categoryStainless
steel A8

PRODUCT RANGE


Download
Technical data sheet

MG:06 PG:2615 ETX MH RX8 4.8 X L "RX8" TX25



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Head [mm]	Unit [pcs]
19876	ETX MH RX8 4.8 X 45/35 "RX8" TX25	Ø4.8	45	10	Ø12.1 TX25	250
19879	ETX MH RX8 4.8 X 60/35 "RX8" TX25		60	25		100

APPLICATION

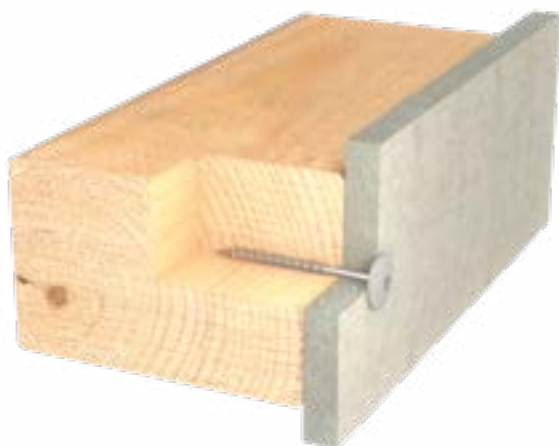

STAINLESS FACADE SCREW

SCREW FOR FASTENING OF CLADDINGS TO WOOD

- Large head for better load distribution
- Screw with drill point, no predrilling is necessary
- Stainless steel screw A2
- Has wings for cutting an oversize hole, so that the wood can move
- Available in 500 colours (QUALICOAT certified facade quality powder)



TX

Corrosion
categoryStainless
steel A2

PRODUCT RANGE

Download
teknisk datablad

MG:06 PG:2603 ETX MH RX 5.0 X L #2 TX20 W



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Drill point	Head [mm]	Unit [pcs]
15711	ETX MH RX 5.0 X 36 #2 TX20 W	Ø5.0	36	12	#2	Ø12.1 TX20	250

APPLICATION




BI-METAL FACADE SCREW

SCREW FOR FASTENING OF CLADDINGS TO STEEL SHEET

- Drilling, tapping and fastening in one operation
- Stainless steel screw quality A2 with reduced drill point #1 in hardened steel
- Large flat below the head for better load distribution
- Art.no. 18602 is full threaded and 14755 is partly threaded
- Available in 500 colours (QUALICOAT certified facade quality powder)

PRODUCT RANGE



MG:06 PG:2795 ETX MH RXB 4.8 X L #1S TX20 PT



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
18602	ETX MH RXB 4.8 X 28 #1S TX20 FT	Ø4.8	28	-	15.0	#1S	0.56 - 1.50	Ø12.5 TX20	250
14755	ETX MH RXB 4.8 X 29 #1S TX20 PT		29	6.0	16.0				

APPLICATION



STAINLESS FACADE SCREW

SCREW FOR FASTENING OF SLIDING CLIPS TO WOOD

- Screw with s-point, with and without thread cut (TC)
- Stainless steel screw A2
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:6109 **FH RX 4.8 X L TX20**



Download
technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
17750	FH RX 4.8 X 19 TX20	Ø4.8	19	Ø10.0 TX20	500
16807	FH RX 4.8 X 30 TX20		30		

MG:06 PG:6111 **FH RX 4.8 X L TX20 TC**



Download
technical data sheet




Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
16808	FH RX 4.8 X 30 TX20 TC	Ø4.8	30	Ø10.0 TX20	500

GUTTER BRACKET SCREW

SCREW FOR FASTENING OF GUTTER BRACKETS TO WOOD

- PG 8040:
 - Thread cut for better cutting in wood
 - Available with ZYTEC™ for good corrosion protection
 - Available with standard colours Black (RAL 9005), Silver (RAL 9006) and white (RAL 9010)
- PG 4475:
 - Reduced drill point for better pull-out values
 - Available with ZYTEC™ M for good corrosion protection
 - Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:8040 TRS PH 4.8 X L TX20 TC



Download
Technical data sheet



TX



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
13069	TRS PH 4.8 X 35 TX20 TC	Ø4.8	35	Ø9.5 TX20	250
13327	TRS PH 4.8 X 45 TX20 TC		45		

MG:06 PG:4475 CSH 4.8 X L #1 PH2



Download
Technical data sheet



Effektive
længde



PH



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
16789	CSH 4.8 X 32 #1 PH2	Ø4.8	32	26	#1	2 x 0.5 - 2 x 1.0	Ø8.0 PH2	500


APPLICATION



STAINLESS GUTTER BRACKET SCREW

SCREW FOR FASTENING OF GUTTER BRACKETS TO WOOD

- Screw with Pan head and TX20 recess
- Point with thread cut for better threading in wood
- Stainless steel screw A2
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:8050 PH RX 4.8 X L TX20 TC



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
15619	PH RX 4.8 X 25 TX20 TC	Ø4.8	25	Ø9.5 TX20	250
13070	PH RX 4.8 X 35 TX20 TC		35		

APPLICATION



WINDOW SILL SCREW

SCREW FOR FASTENING OF SHEETS TO WOOD

- Screw with Pan head and SQ2 recess
- Surface treated with ZYTEC™+ for optimal corrosion protection
- Twin threads for faster installation
- Art. no. 16961 is available with ZYTEC™ Colour with standard colours; Light grey (RAL 7035), Graphite grey (RAL 7024), Brick red (RAL 8004), Black (RAL 9005) and Silver (RAL 9006)
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:8075 PH 4.2 X L SQ EPDM-8B



Download
Technical data sheet



Art.no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
16805	PH 4.2 X 20 SQ	-	Ø4.2	20	Ø9.8 SQ2	250
16961	PH 4.2 X 20 SQ EPDM-8B	EPDM Ø8				

APPLICATION



STAINLESS WINDOW SILL SCREW

SCREW FOR FASTENING OF SHEETS TO WOOD

- Screw with Pan head and SQ1 recess
- Point with thread cut for better threading in wood
- Stainless steel screw A2/A4
- Available in 500 colours (QUALICOAT certified facade quality powder)



PRODUCT RANGE

MG:06 PG:8061 PH RX 3.5 X L SQ1 TC



Download
Technical data sheet



Corrosion
category



Stainless
steel A2



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
15847	PH RX 3.5 X 20 SQ1 TC	Ø3.5	20	Ø6.9 SQ1	250

MG:06 PG:8060 PH RX4 3.5 X L SQ1 TC



Download
Technical data sheet



Corrosion
category



Stainless
steel A4



Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
13071	PH RX4 3.5 X 25 SQ1 TC	Ø3.5	25	Ø6.9 SQ1	250

APPLICATION



BI-METAL WINDOW SILL SCREW

SCREW FOR FASTENING OF SHEETS TO WOOD

- Screw with Pan head and SQ1 recess
- Stainless steel screw A2 with drill point #1 in hardened steel
- Available in 500 colours (QUALICOAT certified quality powder)



PRODUCT RANGE

MG:06 PG:8055 PH RXB 3.5 X L #1 SQ



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
16797	PH RXB 3.5 X 20 #1 SQ1	Ø3.5	20	7.5	#1	2 x 0.5 - 2 x 1.0	Ø6.9 SQ1	500

APPLICATION



VENTILATION SCREWS

» for fastening of ventilation pipes and -fittings

Page

VTs HWH 4.2 X L HX1/4" TX20 **113**

VTs HWH 4.2 X L #1S HX1/4" TX20 **113**



VENTILATION SCREW

SCREW FOR FASTENING OF VENTILATION DUCTS AND FITTINGS

- PG:7216 Hardened screw with s-point for fast assembly of steel sheets (up to 2 x 0.75 mm)
- PG:7217 Hardened screw with drill point #1S for assembly of steel sheets (up to 2 x 1.0 mm)
- Surface treated with 3-6 µm zinc
- Tall head for easy and stable mounting



Hex head
with TX
recess



Corrosion
category



Hardened
steel

PRODUCT RANGE

MG:06 PG:7216 VTS HWH 4.2 X L HX1/4" TX20



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
15911	VTS HWH 4.2 X 9.5 HX1/4" TX20	Ø4.2	9.5	S-point	2 x 0.75	HEX 1/4" TX20	1000
13801	VTS HWH 4.2 X 13 HX1/4" TX20		13.0				
19478	VTS HWH 4.2 X 38 HX1/4" TX20		38.0				
19480	VTS HWH 4.2 X 50 HX1/4" TX20		50.0				

MG:06 PG:7217 VTS HWH 4.2 X L #1S HX1/4" TX20



Download
Technical data sheet



Effective
length



Art.no.	Item name	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
13803	VTS HWH 4.2 X 13 #1S HX1/4" TX20	Ø4.2	13.0	6.5	#1S	2 x 0.5 - 2 x 1.0	HEX 1/4" TX20	1000

APPLICATION



DRYWALL- AND WAFER HEAD SCREWS

» for fastening of plasterboards

	Page
WAFER HEAD SCREWS PPS 4.2 X L PH2 LOW HEAD	114
PPS 4.2 X L PH2	115
PPS 4.2 X L PH2 LOW HEAD	115
PPS 4.2 X L #2 PH2	116
PPS RX 4.2 X L PH2 HL	117
PPS RX 4.2 X L PH2 LOW HEAD	117



WAFER HEAD SCREW

SCREW FOR FASTENING TO WOOD, STEEL OR ALUMINIUM

- Large head for better load distribution
- Flat head for an aesthetic finish
- Surface treated with ZYTEC™ M for better corrosion resistance
- Available in 500 colours (QUALICOAT certified quality powder)



PH

Corrosion
categoryHardened
steel

PRODUCT RANGE

MG:06 PG:3120 PPS 4.2 X L PH2 LOW HEAD

Download
Technical data sheet

Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
18541	PPS 4.2 X 19 PH2 LOW HEAD	Ø4.2	19	Ø11.0 PH2	500

WAFER HEAD SCREW

SCREW FOR FASTENING TO WOOD OR STEEL

- Hardened screw with s-point for fastening in steel sheets up to 1.0 mm
- PG 3100: Surface treated with ZYTEC™ M (C3) or 3-6 µm zinc (C1)
- PG 3101: Surface treated with ZYTEC™ M (C3)
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:3100 PPS 4.2 X L PH2

Download
Technical data sheetCorrosion
category

Art.no.	Item name	Configuration	Thread [mm]	Length L [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10727-18	PPS 4.2 X 13 PH2	ZYTEC M	Ø4.2	13	S-point	Max. 1.0	Ø10.8 PH2	1000
10727-21		ZnB						
14104-18	PPS 4.2 X 16 PH2	ZYTEC M		16				
14104-21		ZnB						
10722-18	PPS 4.2 X 19 PH2	ZYTEC M		19				500
10722-21		ZnB						
10725-18	PPS 4.2 X 25 PH2	ZYTEC M		25				
10725-21		ZnB						
10726-18	PPS 4.2 X 32 PH2	ZYTEC M		32				
10726-21		ZnB						
14105-18	PPS 4.2 X 38 PH2	ZYTEC M		38				
14105-21		ZnB						
10724-18	PPS 4.2 X 45 PH2	ZYTEC M		45				250
10724-21		ZnB						
10723-18	PPS 4.2 X 65 PH2	ZYTEC M		65				
10723-21		ZnB						
14107-18	PPS 4.2 X 75 PH2	ZYTEC M		75				
14107-21		ZnB						
13079-18	PPS 4.2 X 85 PH2	ZYTEC M		85				200
13079-21		ZnB						

MG:06 PG:3101 PPS 4.2 X 25 PH2 LOW HEAD

Download
Technical data sheetCorrosion
category

Art.no.	Item name	Thread [mm]	Length L [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
16788	PPS 4.2 X 25 PH2 LOW HEAD	Ø4.2	25	#PP	Max. 1.0	Ø11.0 PH2	500

APPLICATION



WAFER HEAD SCREW

SCREW FOR FASTENING TO STEEL

- Hardened screw with drill point #2
- Fastening in max. 2 x 1.5 mm steel
- The large flat head secures a good load distribution and an aesthetic finish
- Surface treated with 3-6 µm zinc (C1) or ZYTEC™ M (C3) for better corrosion resistance
- Ø11 mm wafer head and Phillips recess
- Available in 500 colours (QUALICOAT certified powder)



Effective Length



PH



Corrosion category



Hardened steel

PRODUCT RANGE



Download Technical data sheet

MG:06 PG:3000 PPS 4.2 X L #2 PH2



Art.no.	Item name	Configuration	Thread [mm]	Length L [mm]	Effective length L _{ef} [mm]	Drill point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10729-18	PPS 4.2 X 13 #2 PH2	ZYTEC M	Ø4.2	13	3.5	#2	Max. 2 x 1.5	Ø11 PH2	1000
10729-21		ZnB							
13073-18	PPS 4.2 X 16 #2 PH2	ZYTEC M		16	6.5				
13073-21		ZnB							
13074-18	PPS 4.2 X 19 #2 PH2	ZYTEC M		19	9.5				500
13074-21		ZnB							
10730-18	PPS 4.2 X 25 #2 PH2	ZYTEC M		25	15.5				
10730-21		ZnB							
10728-18	PPS 4.2 X 32 #2 PH2	ZYTEC M		32	22.5				250
10728-21		ZnB							
10720-18	PPS 4.2 X 41 #2 PH2	ZYTEC M		41	31.5				
10720-21		ZnB							
10721-18	PPS 4.2 X 65 #2 PH2	ZYTEC M		65	55.5				
10721-21		ZnB							

APPLICATION



WAFER HEAD SCREW

SCREW FOR FASTENING TO ALU OR WOOD

- Stainless steel screw A2
- S-point for penetration of sheet metal
- Ø11 mm wafer head and Phillips recess
- Available in 500 colours (QUALICOAT certified powder)



PRODUCT RANGE

MG:06 PG:3220 PPS RX 4.2 X L PH2 HL



Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Point	Drill cap. [mm]	Head [mm]	Unit [pcs]
10732	PPS RX 4.2 X 13 PH2 HL	Ø4.2	13	-	S-point	max. 2 x 0.9	Ø11.0 PH2	1000
10734	PPS RX 4.2 X 25 PH2 HL		25	-				500
13080	PPS RX 4.2 X 32 PH2 HL		32	-				
10733	PPS RX 4.2 X 45 PH2 HL		45	5				250
13081	PPS RX 4.2 X 65 PH2 HL		65	25				

MG:06 PG:3103 PPS RX 4.2 X L PH2 LOW HEAD




Download
Technical data sheet



Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Point	Drill cap. [mm]	Head [mm]	Unit [pcs]
18819	PPS RX 4.2 X 25 PH2 LOW HEAD	Ø4.2	25	-	S-point	max. 2 x 0.9	Ø11.0 PH2	500

APPLICATION

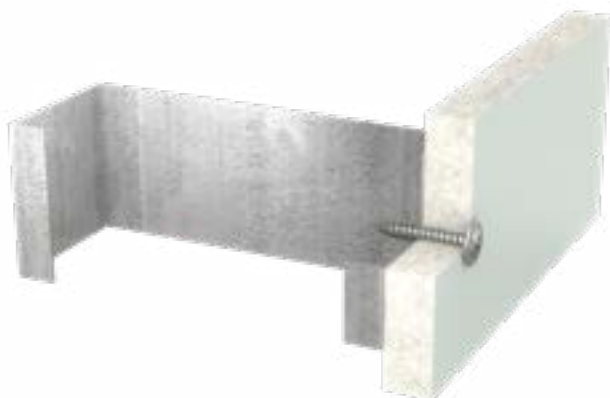

CONCRETE SCREWS

» for fastening in concrete

Page

BTS CSH-R 7.5 X L TX30 **119**

BTS NH 7.5 X L TX30 **120**

BTS HWH 7.5 X L HX13 TX30 **121**

BTS PH 7.5 X L TX30 **121**



CONCRETE SCREWS

SCREW FOR FASTENING IN CONCRETE, LIGHTWEIGHT CONCRETE OR BRICK WITHOUT DOWELS

- Primarily used for tension-free installation of windows and doors (frame)
- Timesaving installation - fastens without dowels
- Universal solution, can be used in many different materials
- Countersunk head with ribs and TX30 recess
- Surface treated with 3-6 µm zinc
- Pre-drilling by Ø6.0 mm in brick and Ø6.5 mm in concrete



TX

Corrosion
categoryHardened
steel

PRODUCT RANGE

Download
Technical data sheetMG:06 PG:2710 **BTS CSH-R 7.5 X L TX30**

Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
10497	BTS CSH-R 7.5 X 42 TX30	Ø7.5	42	Ø11.7 TX30	100
10498	BTS CSH-R 7.5 X 62 TX30		62		
10499	BTS CSH-R 7.5 X 72 TX30		72		
10500	BTS CSH-R 7.5 X 92 TX30		92		
10501	BTS CSH-R 7.5 X 112 TX30		112		
10502	BTS CSH-R 7.5 X 132 TX30		132		
10503	BTS CSH-R 7.5 X 152 TX30		152		
10504	BTS CSH-R 7.5 X 182 TX30		182		
10505	BTS CSH-R 7.5 X 212 TX30		212		

APPLICATION



CONCRETE SCREWS

SCREW FOR FASTENING IN CONCRETE, LIGHTWEIGHT CONCRETE OR BRICK WITHOUT DOWELS

- Primarily used for tension-free installation of windows and doors (frame)
- Timesaving installation - fastens without dowels
- Universal solution, can be used in many different materials
- "No-head" screw especially for wooden frames, in which the screw will be totally countersunk
- Surface treated with 3-6 µm zinc
- Pre-drilling by Ø6.0 mm in brick and Ø6.5 mm in concrete



TX

Corrosion
categoryHardened
steel

PRODUCT RANGE

Download
Technical data sheetMG:06 PG:2720 **BTS NH 7.5 X L TX30**

Art.no.	Item name	Thread [mm]	Length L [mm]	Head [mm]	Unit [pcs]
10506	BTS NH 7.5 X 42 TX30	Ø7.5	42	Ø8.5 TX30	100
10507	BTS NH 7.5 X 62 TX30		62		
10508	BTS NH 7.5 X 72 TX30		72		
10509	BTS NH 7.5 X 92 TX30		92		
10510	BTS NH 7.5 X 112 TX30		112		
10511	BTS NH 7.5 X 132 TX30		132		
10512	BTS NH 7.5 X 152 TX30		152		
10513	BTS NH 7.5 X 182 TX30		182		

APPLICATION



CONCRETE SCREWS

SCREW FOR FASTENING IN CONCRETE, LIGHTWEIGHT CONCRETE OR BRICK WITHOUT DOWELS

- Timesaving installation - fastens without dowels
- Universal solution, can be used in many different materials
- PG: 2730 is surface treated with ZYTEC™ M
- PG: 4455 is surface treated with zinc
- Pre-drilling by Ø6.0 mm in brick and Ø6.5 mm in concrete

ST

Hardened
steel

PRODUCT RANGE

MG:06 PG:2730 **BTS HWH 7.5 X L HX13 TX30**Download
Technical data sheetHex head
with TX
recessCorrosion
category

Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Head [mm]	Unit [pcs]
10514	BTS HWH 7.5 X 45 HX13 TX30	Ø7.5	45	-	Ø17.0 HEX 13.0 TX30	200
10515	BTS HWH 7.5 X 65 HX13 TX30		65	-		
14618	BTS HWH 7.5 X 100/65 HX13 TX30		100	35		100

MG:06 PG:4455 **BTS PH 7.5 X L TX30**

TX

Corrosion
category

Art.no.	Item name	Thread [mm]	Length L [mm]	Shank [mm]	Head [mm]	Unit [pcs]
17108	BTS PH 7.5 X 120 TX30	Ø7.5	120	-	Ø11.8 TX30	100

Download
Technical data sheet

APPLICATION



ACCESSORIES: TELESCOPE FIXINGS, WASHERS AND SADDLE WASHERS

» accessories for fastening

		Page
METAL ISO WASHERS	MIS (Standard)	124
	MIS (Undersænket)	124
	MIS (Oval)	124
WASHERS FOR SCREWS	WSH ALU B	125
	M-ALU B	125
	WSH RX G	126
	WSH RX B	126
	WSH RX4 G	126
	WSH RX4 B	126
SADDLE WASHERS	KALOT	127



METAL ISO WASHER

WASHERS FOR FASTENING OF INSULATION

- Surface treated for optimal corrosion protection
- Large surface area for better load distribution



Hardened
steel

PRODUCT RANGE

MG:06 PG:5300 MIS (Standard)



Art.no.	Item name	Thickness [mm]	Diameter [mm]	Hole diameter [mm]	Unit [pcs]
11962	MIS 40 / 6.5	1.0	Ø40	Ø6.5	100
11961	MIS 40 / 8.0	0.8		Ø8.0	

MG:06 PG:5305 MIS (Countersunk)




Art.no.	Item name	Thickness [mm]	Diameter [mm]	Hole diameter [mm]	Unit [pcs]
16720	MIS 40 / 4.8	1.0	Ø40	Ø4.8	100
14860	MIS 40 / 6.5			Ø6.5	

MG:06 PG:5315 MIS (Oval)



Art.no.	Item name	Length [mm]	Width [mm]	Thickness [mm]	Hole diameter [mm]	Unit [pcs]
11960	MIS 82 X 40 / 6.0	82.0	40.0	1.0	Ø6.0	100
21012	MIS 82 X 40 / 8.5				Ø8.5	

APPLICATION

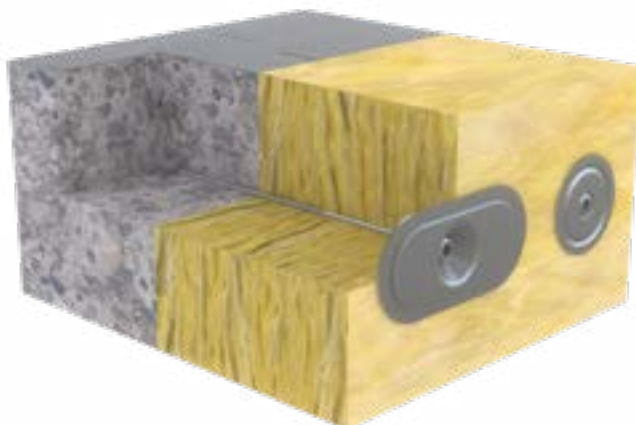

WASHER FOR SCREWS

WASHERS WITH VULCANIZED EPDM FOR INCREASED SEALING ABILITIES

- Alu washer with black EPDM (ALU)
- M-alu washer with black EPDM (M-ALU)

PRODUCT RANGE

MG:06 PG:3940 **WSH ALU B**



Art.no.	Item name	EPDM colour	Diameter [mm]	Screw diameter [mm]	Thickness [mm]
16875	WSH ALU-10B #8/10	Black	Ø10	Ø4.2 / Ø4.8	3.5
10008	WSH ALU-14B #10		Ø14	Ø4.8	4.0
10367	WSH ALU-16B #12/14		Ø16	Ø5.5 / Ø6.3	4.5
12561	WSH ALU-19B #10		Ø19	Ø4.8	5.0
12565	WSH ALU-19B #14			Ø6.3	
15977	WSH ALU-19B #18			Ø8.0	
19192	WSH ALU-22B #14		Ø22	Ø6.3	5.0

MG:06 PG:2410 **M-ALU B**



Art.no.	Item name	EPDM colour	Diameter [mm]	Screw diameter [mm]	Thickness [mm]
10257	WSH M-ALU-14B #10	Black	Ø14	Ø4.8	3.0

STAINLESS WASHER FOR SCREWS

WASHERS WITH VULCANIZED EPDM FOR INCREASED SEALING ABILITIES

- Stainless steel washer A2 (RX)
- Stainless steel washer A4 (RX4)

PRODUCT RANGE

MG:06 PG:3990 WSH RX G

A2
INOX
Stainless
steel A2

Art.no.	Item name	EPDM colour	Diameter [mm]	Screw diameter [mm]	Thickness [mm]
10422	WSH RX-12G #10	Grey	Ø12	Ø4.8	4.0
10424	WSH RX-14G #10/12		Ø14	Ø4.8 / Ø5.5	
10425	WSH RX-16G #12/14		Ø16	Ø5.5 / Ø6.3	
10427	WSH RX-19G #14		Ø19	Ø6.3	5.0
15160	WSH RX-22G #12/14		Ø22	Ø5.5 / 6.3	
10429	WSH RX-25G #12		Ø25	Ø5.5	5.5
10430	WSH RX-29G #14		Ø29	Ø6.3	

MG:06 PG:4000 WSH RX B

A2
INOX
Stainless
steel A2

Art.no.	Item name	EPDM colour	Diameter [mm]	Screw diameter [mm]	Thickness [mm]
20118	WSH RX-10B #8	Black	Ø10	Ø4.2	3.5
19357	WSH RX-12B #10		Ø12	Ø4.8	4.0
10423	WSH RX-14B #10/12		Ø14	Ø4.8 / Ø5.5	
20340	WSH RX-16B #12/14		Ø16	Ø5.5 / Ø6.3	4.5
10426	WSH RX-16B #14			Ø6.3	
17329	WSH RX-19B #14		Ø19	5.0	
20341	WSH RX-22B #14		Ø22		

MG:06 PG:4055 WSH RX4 G

A4
INOX
Stainless
steel A4

Art.no.	Item name	EPDM colour	Diameter [mm]	Screw diameter [mm]	Thickness [mm]
17249	WSH RX4-16G #10	Grey	Ø16	Ø4.8	4.0
10431	WSH RX4-16G #12			Ø5.5	

MG:06 PG:4048 WSH RX4 B

A4
INOX
Stainless
steel A4

Art.no.	Item name	EPDM colour	Diameter [mm]	Screw diameter [mm]	Thickness [mm]
17395	WSH RX4-12B #10/12	Black	Ø12	Ø4.8 / Ø5.5	4.0
19919	WSH RX4-14B #12		Ø14	Ø5.5	
19340	WSH RX4-16B #12/14		Ø16	Ø5.5 / Ø6.3	

SADDLE WASHER

SADDLE WASHER FOR TRAPEZOIDAL PROFILES/SHEETS

- Especially designed for fastening trapezoidal profiles/ sheets or sandwich panels
- With vulcanized EPDM for increased sealing abilities
- For other sizes, please contact the company
- Selected items available in several colours



PRODUCT RANGE

MG:06 PG:7200 KALOT



Art.no.	Item name	Hole diameter [mm]	Profile width [mm]	Angle [deg]	Length [mm]
13181	KALOT 25 / 27 / 30	Ø7.2	25	27	30

APPLICATION



EUROPEAN TECHNICAL APPROVAL

CE-MARKING

CE an abbreviation for "Conformité Européenne" - the European communities. CE marking is introduced by the European Commission, which has established the conditions for use of labels in the different CE marking directives. The directives are applicable throughout the EU and EEA area - Norway, Iceland and Liechtenstein, which has joined the EEA Agreement.

General information on CE marking

RED HORSE has established an advanced production control on all products. We believe that control is linked with quality. Likewise, a wide range of our products are CE approved and therefore subject to a range of production requirements which are formulated in the directives.

The CE mark is a common European label to be affixed on the product groups covered by an EU directive. The purpose of CE marking is to ensure healthy and safe products and to reduce technical trade barriers within the EU. The rules are therefore identical in all EU countries and the national authorities may not impose stricter requirements for CE-marked product design, than EU member states have agreed upon.

The rules for CE marking are defined in a wide range of product directives - laws that concerns specific types of industrial products. The product directives does generally not contain many technical details, but describe in broad terms what the manufacturers must be aware of in the production of healthy and safe products. The technical details are described

in the European harmonized standards (European Norms).

The CE mark indicates that a product is manufactured and inspected in accordance with a harmonized standard or an European technical approval. Harmonization is achieved at the technical level of standards and technical approvals. These include the provision of construction products properties determined by calculation or testing.

By CE marking the manufacturer or its representative in the EU declares that a given product meets the general safety requirements in the relevant European (CE marking) directives. It is therefore the manufacturer or its representative in the EU who is responsible for the correct CE marking.

EU standards and norms

Products covered by a harmonized standard must be CE marked. Additionally, a number of products that have a European Technical Approval (ETA) can also be CE-marked.

An ETA is application oriented and may approve a complete building systems where each component is regulated by a standard or a CUAP (Common Understanding of Assessment Procedures.) If there is no CUAP for a given structural element, one can apply to get this prepared. But it should be mentioned that this can be a very slow (up to several years) and costly process.

CE marking can be regarded as a trust agreement between authorities and business. The label indicates that the product characteristics are declared in a uniform manner so that it freely can be distributed on the European Common Market without further demands on national testing and approval.

Type testing and production control

CE marking is based on 2 main principles for certification of conformity:

- ITT (Initial Type Testing)
- FPC (Factory Production Control)

ITT is test used when product characteristics is to be determined. How to test or calculate is described in the relevant standard.

FPC is the production control (quality) which ensures that the product characteristics, which are to be declared, constantly meet the values specified in the ITT.

RED HORSE has an advanced production control on all products - including products that are not covered by an European approval.





SURFACE TREATMENT

Surface treatment of carbon steel is normally done to enhance corrosion resistance.

According to EN ISO 12944-2 corrosion classes are defined by 6 different categories. To decide which corrosion category to follow you need to know the use, placement and environmental conditions of the application.

Surface treated carbon steel is almost never used in a corrosion category above C3. Stainless steel is recommended if the application requires a corrosion category above C3. At RED HORSE we recommend stainless steel solutions to be categorized as C4–C5. We recommend material quality A4 (acid resistant) in the case of acidic environments.

We use the following titles for our surface treatments:

Zink (different thicknesses)

ZYTEC™+

ZYTEC™ M

ZYTEC™ D

ZYTEC™ GX

ZYTEC™ Colour

Additional technical information can be obtained by contacting our customer service.

These statements are only indicative and should be verified in each case.

Corrosion category	Environmental aggressiveness	Examples of environment	Material and surface treatment
C1	Very low	- heated dry room (RH <60%) with clean air, for example: houses, offices, shops, schools, hotels, etc.	Carbon steel min. 3-6 µm zinc
C2	Low	- open country with low pollution - indoors unheated rooms where condensation may occur, for example: warehouses and sports halls	Carbon steel min. 12 µm zinc
C3	Middle	- city atmosphere and moderately polluted industrial atmosphere - production buildings with high humidity and no air pollution, for example: food establishments, laundries and breweries	Carbon steel min. 20 µm zinc / ZYTEC™ or similar
C4	High	- industrial areas - coastal areas with moderate salt exposure for example: chemical plants, shipyards	Stainless steel min. quality A2/A4
C5	Very high	- industrial areas with high humidity and aggressive atmospheres - buildings or areas with almost permanent condensation and high pollution - in hollow brick walls (acc. masonry norm)	Stainless steel min. quality A4



POWDER COATING

At RED HORSE we have many years experience in powder coating items. We can deliver both large and small quantities of items painted in any color - quickly and reliably.

Powder coating takes place at our factories in Denmark and Sweden. The powder coating technique demands a high level of technology. We fulfill the customer wish – and are able to deliver screws in uncommon colors and special structures - direct to site.

RED HORSE only uses powder in facade quality which are approved for outdoor use. The powder coating must be able to withstand sun, wind and weather for many years. Our powder coat is certified in accordance with the demanding Qualitcoat standard and is bought from reputable suppliers.

As a result of many years of continuous development we can offer an excellent, uniform and durable coating. The adhesion of the head and washer is checked regularly. We carry out ongoing monitoring of coating thickness, etc.



TECHNICAL INFORMATION

RED HORSE powder coating is characterized by:

- Polyester-based powder
- Accordance with Qualitcoat Category Level 1
- Average thickness > 40mm (may vary depending on color)
- Gloss: 30±5

Advantages of powder coating contra wet painting:

- Mechanically robust/tough/ductile/deformable /impact resistance
- Chemical resistant (close pores, physical barriers)
- Great coat thickness (strong and wear resistant in assembly and in life)
- Uniform coat thickness
- Strong adhesion (both on various metals and surface treatments)
- Less recess-filling
- Greater galvanic isolation (insulation between the screw and application)
- Possibility of repainting (no boil-up)
- No solvents or heavy metals
- Environmentally friendly (high utilization => less waste. Non-toxic)





RED HORSE[®]

RED HORSE
Niels Bohrs Vej 25
Stilling
8660 Skanderborg
Denmark

Tel.: +45 86950099

info@redhorse.dk
www.redhorse.dk